

GENERAL

FM Mag Gauge is a float type metal tube level gauge. Liquid level is indicated by clear and visible color flappers. This eliminates problems likely in indication by existing glass gauges.

In addition, special material of PVC, Fluorocarbon resin etc. are ready to cover very corrosive liquid level measurement.

Alarm contacts and / or analog output unit can be additionally provided for remote monitoring and control purpose.

OPERATION PRINCIPLE



A float, in which a rounded shape magnet is integrated, is located in a non-magnetic tube (called Chamber). This float moves up and down depending on the liquid level in chamber with specified draft line. Outside of the chamber, an indicator unit is installed, in which plastic magnet rotating flappers are provided. The front surfaces of such flappers are black and the other sides of flappers are coloured in yellow for every 10mm and red for every 100mm. Then these flappers are rotated by movement of float to indicate liquid level in colour flappers.

FM Mag Gauge can be provided with alarm contacts and/or analog output (DC4~20mA) unit additionally onto this level indicator.

A reed switch in aluminum case at the setting point is actuated by the magnet in moving float. Water-tight construction, intrinsically safe system with the safety relay, and flameproof enclosure are available.

The 4 to 20 mA output type has the detection mechanism of float location (liquid level) along chamber.

The detector consists of a series of reed switches and precision type resistances which are actuated by the magnet inside float. The voltage signal of liquid level is converted to 4 to 20 mA signal for transmitting. Water-tight construction and flame-proof enclosure are available.

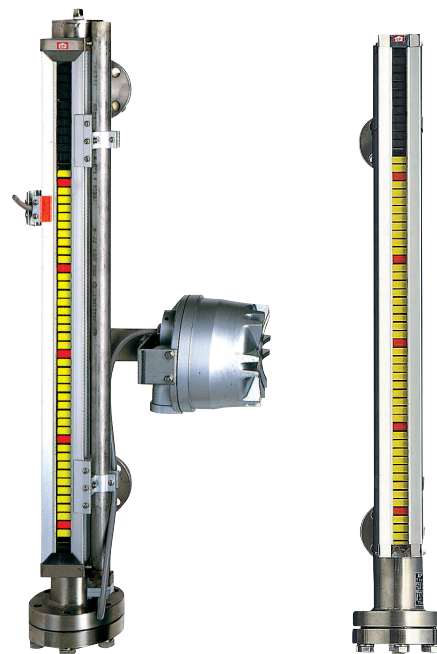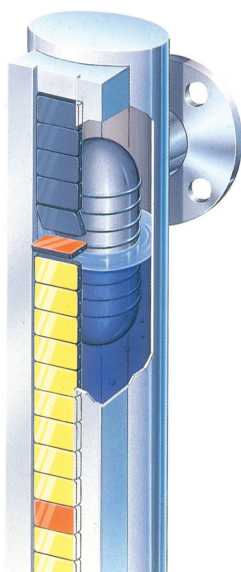

FEATURES

- ☐ Metal tube
Free from breakage and leakage.
- ☐ Clear and visible indication
By colour flappers, Liquid level in tanks is easily observed even from a distance. Free from blurs and smudges which are common for Glass Gauges.
- ☐ Covering high pressure and temperature
HPGSL*1 approved version is also available.
*1 High Pressure Gas Safety Law
- ☐ Various materials available
In addition to standard stainless steel, highly corrosion-resistant materials such as PVC and fluororesin are available.
- ☐ Full function
Indication, alarm contacts as well as analog output.
One unit of FM Mag Gauge covers all necessary functions of level monitoring and control.

STANDARD SPECIFICATION

Measuring object	: Max. viscosity 600mPa·s and without sticking and crystallization.
Available range	: Refer to pages of subject models.
Maximum OP. Press.	: Refer to pages of subject models.
Temp. range	: Refer to pages of subject models.
Level indication	: By colour flappers
Interval of flappers	: 10mm
Indication accuracy	: $\pm 15\text{mm}$
Process connection.	: Standard; Tank side through 1"(25mm) flanges Details are to be referred to pages of subject models.
Material	: To be referred to pages of subject models.
* The indication can follow up to 2cm/s in liquid level changing speed.	

Consult factory for jacket type.

Consult factory for the direction of the connection nozzle other than "side – side".

DESCRIPTION OF MODEL CODE

Model code of FM Mag Gauge is described as follows;

1) Only for local indicator

FM-123-4

2) Local indicator+Alarm contacts

FM-123-4567

3) Local indicator+Analog output

FM-123-4/8910

4) Local indicator+Alarm contacts+Analog output

FM-123-4567/8910

/8910 to be added to the end of code indication 2)

1	Indicator	Press., Temp. class (2 digit)
2		Chamber, Nozzle material
3		Float material and density range
4		Conn. flange rating
5	Alarm	Enclosure of alarm (Water-tight, intrinsic safety, flameproof)
6		No. of contact
7		No. of terminal box
8	Analog output	Enclosure of analog unit (Water-tight, intrinsic safety, flameproof)
9		Direction of sensor
10		Direction of convertor

Refer to pages of subject models for details of model code.


SUGGESTIONS

● On liquid level indication

The indicator flappers are actuated by magnet in float. There are different types of float for models, but the position of magnet and actual liquid level (Draft line to float) are different depending on the liquid density. Thus, the position where specific indicator flapper rotates and the position of actual liquid level are different slightly. This gap is fixed and shifted upward in fixed value. This gap (A) is indicated in Approval drawing. The zero line of indicator is to be located above actual liquid zero point by distance of A. Refer to instruction manual for details.


Also, be careful for minimum density for the float. Operation problem may occur in case of lower density than designed density.

Interface measurement and / or extreme low and high density liquid measurement are available on request. Consult factory for details.

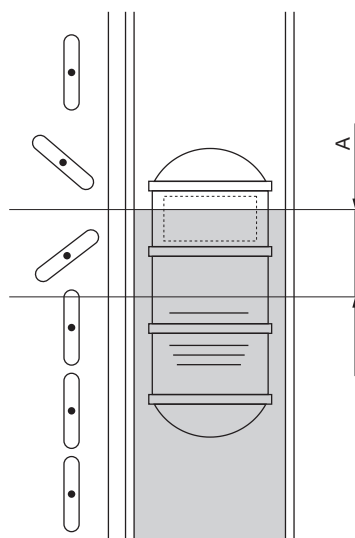

● Heating and heat insulation

In case of necessity of heating and thermal insulation for sticky liquids etc., thermal insulation is to be provided only for chamber portion as shown below. Do not cover indicator, alarm and analog unit by thermal insulation material. The heating or insulation on these parts might causes damages or malfunctioning of indication, alarm or transmitting mechanism.

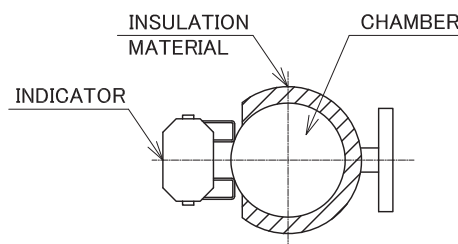

MODEL SELECTION GUIDANCE

Different types and materials are available for FM Mag Gauge. Refer to the following table for selection.

● For normal temperature

(Up to 120°C. Note that certain resins have a narrower temperature range.)

Model	Chamber material	Float material	Temperature range (°C)	Max. operating pressure	Available length (mm)	
				MPa	Min.	Max.
FM- 121□	SUS304	*3 SUS316, SUS316L or titanium (TP340)	$-10 \leq t \leq 120$	SUS: 3 TP340: 2.5	0 to 250	0 to 4380
	122□ SUS316					
	123□ SUS316L					
	12Z□ Special metal	Consultation required				
FM- 124□	PVC (HPVC)	PVC (HPVC)	$0 \leq t \leq 60$ (80)	0.2	0 to 250	0 to 2000
	125□ Stainless steel + PVC lining					0 to 4000
FM- 126□	Stainless steel + ETFE lining	NBR foam + PFA lining	$0 \leq t \leq 100$	0.2	0 to 250	*2
FM- 127□	Stainless steel + PFA lining					0 to 3500
FM- 128□	Stainless steel + PTFE lining					
FM- 141□	SUS304	*3 titanium alloy	*1 $-10 \leq t \leq 120$	13	0 to 250	0 to 4380
	142□ SUS316					
	143□ SUS316L					
	14Z□ Special metal					

● For high temperature

Model	Chamber material	Float material	Temperature range (°C)	Max. operating pressure	Available length (mm)	
				MPa	Min.	Max.
FM- 161□	SUS304	*3 SUS316, SUS316L or titanium (TP340)	*1*4 $-196 \leq t \leq +150$ $-10 \leq t \leq +400$ The maximum operating temperature for TP340 is 250°C.	SUS: 2 TP340: 1.6	0 to 250	0 to 4380
	162□ SUS316					
	163□ SUS316L					
	16Z□ Special metal	Consultation required				
FM- 181□	SUS304	*3 Titanium alloy	*1*4 $-196 \leq t \leq +150$ $-10 \leq t \leq +400$	13	0 to 250	0 to 4380
	182□ SUS316					
	183□ SUS316L					
	189□ Special metal					

*1 : For $-196^{\circ}\text{C} \leq t < -10^{\circ}\text{C}$, a sealed indicator is used for manufacturing.

*2 : ETFE lining is available up to 2400 mm, and PTFE lining for full vacuum is available up to 2500 mm.

*3 : Titanium (TP340) and titanium alloys are susceptible to hydrogen embrittlement in a hydrogen atmosphere.

*4 : For $350^{\circ}\text{C} < t$, the indicator will use window glass.

5

FM-1240,1250

Made of PVC for low pressure and moderate temperature

FM-1240 series are level gauge with PVC material for both chamber and float to cover corrosive liquids.

FM-1250 has a PVC lined stainless steel chamber which offers better mechanical durability than pure PVC chambers.

AVAILABLE RANGES OF PRODUCTS


Range : Min. 0~250mm

Max. 0~2000mm *2

Max. Press. : 0.2MPa (cannot withstand full vacuum)


Temp. range : 0°C ≤ t ≤ 60°C (HPVC : 0°C ≤ t ≤ 80°C)

DIMENSIONS

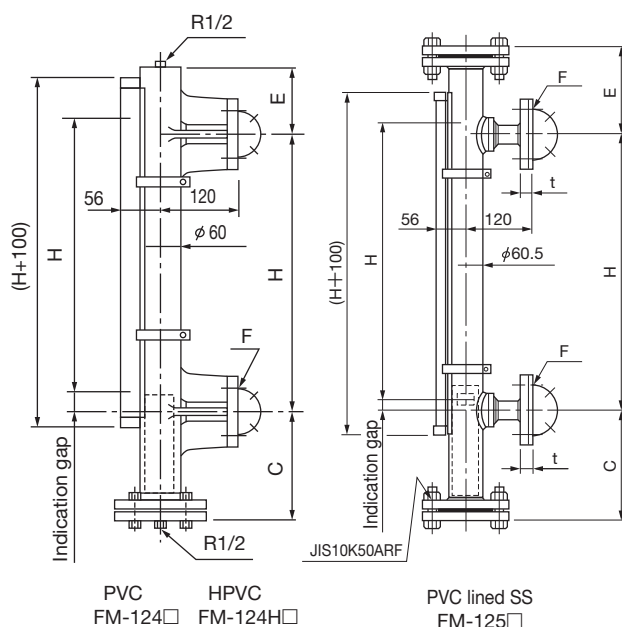


INDICATOR INSTALLATION ANGLE

FM-124
FM-124H

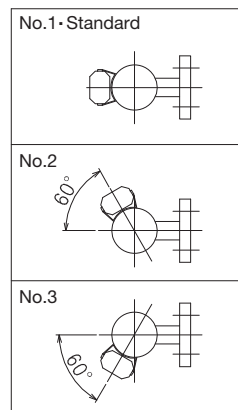

FM-125

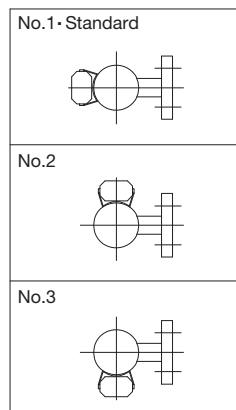

MODEL CODE

		—	12		—		Description
Flapper pitch	FM						10mm (Accuracy ±15mm)
Chamber material		4					PVC
		4H					HPVC
		5					St. Stl.+PVC lining
Density range (g/cm³) Float material *1		5					0.75~0.9 (0.7~0.8)
		6					0.8~1.0 (0.75~0.9)
		7					0.9~1.3 (0.85~1.2)
		8					1.05~1.7 (1.0~1.5)
		9					1.4~2.0 (1.35~2.0)
Connection flange rating *3		0					25A JIS 10KFF (t=21)
		2					1" JPI 150#FF (t=19.7)
		3					1" ANSI 150#FF (t=19.7)
		7					25A JIS 5KFF (t=17)
		8					Other 1" (25A) flanges
		9					Special

*1 Float material is PVC or HPVC. () indicates applicable density range for FM-125 □ type (Stainless steel + PVC lining).

*2 In case of material code 5, max.4000mm is available.

*3 Connection flange of lined version is Flat Face (20A or more).
The inside of parenthesis shows the thickness of flange.

FLOAT AVAILABILITY AND SIZES

For PVC version FM-124 □ and HPVC version FM-124H □

No.	Density (g/cm³)	Design		L	Float
		C	E		
5	0.75~0.9	290	120	300	 PVC,HPVC
6	0.8~1.0	250	120	250	
7	0.9~1.3	200	120	200	
8	1.05~1.7	150	120	150	
9	1.4~2.0	140	120	150	

For Stainless steel+PVC lining version FM-125 □

No.	Density (g/cm³)	Design		L	Float
		C	E		
5	0.7~0.8	290	150	300	 PVC
6	0.75~0.9	250	150	250	
7	0.85~1.2	200	160	200	
8	1.0~1.5	150	170	150	
9	1.35~2.0	140	180	150	

FM-1260, 1270

Made of Fluorocarbon resin for low pressure and moderate temperature

This series of gauges is made of fluorocarbon resin and other anti-corrosive materials.

AVAILABLE RANGES OF PRODUCTS

Range : Min. 0~250mm
Max. 0~3500mm
Maximum range of ETFE lining type is 2400mm

Max. Press. : F.V. ~0.2MPa


Temp. range : 0°C ≤ t ≤ 100°C

Details of lining


ETFE lining: FM-126 □ Lining thickness 1.6 mm

PFA lining : FM-127 □ Lining thickness 1.75 mm

DIMENSIONS

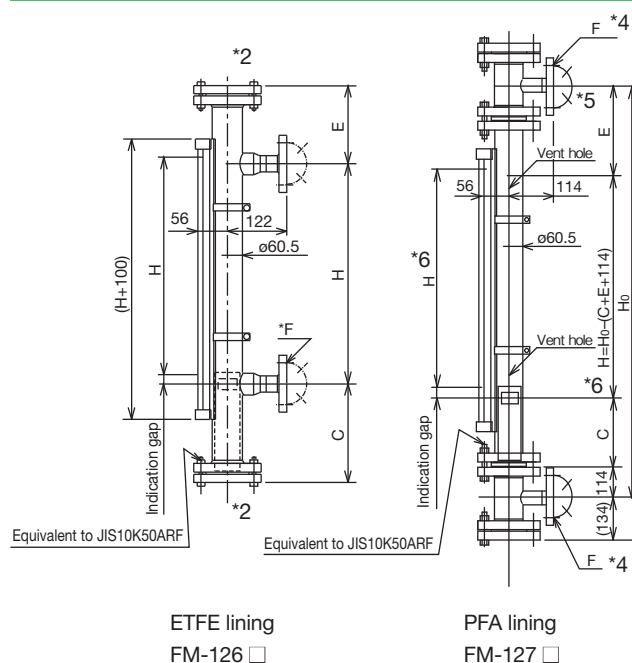

INDICATOR INSTALLATION ANGLE

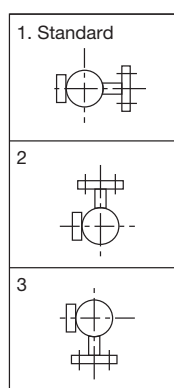

* Vent holes are arranged on the metal tube. Do not fill them with paint or heat insulator. Keep vent holes away from rain water and condensation. If gas penetrating the lining dissolves into any water, it may corrode the metal tube.

MODEL CODE

		— 12			Description
Flapper pitch	FM				10mm(Accuracy ±15mm)
Chamber material		6			ETFE lining
		7			PFA lining
Density range (g/cm³) Float material	A				0.72~0.75
	B				0.75~0.8
	C				0.8~0.9
	E				0.9~1.0
	F				1.0~1.3
	G				1.3~1.5
	H				1.5~2.0
Connection flange rating *					Special
	1				25A JIS 10K
	2				1" ANSI(JPI)#150
	9				Special

* The flange face of lining type is equivalent to the raised face of flange.

FLOAT AVAILABILITY AND SIZES

For ETFE lining version FM-126 □

No.	Density (g/cm³)	Design			Float
		C	E	L	
A	0.72~0.75	400	190	400	
B	0.75~0.8	370	190	345	
C	0.8~0.9	310	190	280	
E	0.9~1.0	240	190	210	
F	1.0~1.3	200	190	170	
G	1.3~1.5	190	190	190	
H	1.5~2.0	190	190	190	

Titanium+PFA lining available on request

(Dimension will be changed. Consult factory for details.)

*1 The float for vacuum services is made of either stainless steel or titanium lined by ETFE.

*2 The blind flanges for vacuum services are made of carbon steel lined by PTFE.

*3 The float for vacuum services has a different shape and sizes.

*4 Connection F

*5 Shape and dimension E

*6 Measuring range H

For PFA lining version FM-127 □

No.	Density (g/cm³)	Design			Float
		C	E	L	
A	0.72~0.75	400	270	400	
B	0.75~0.8	350	270	345	
C	0.8~0.9	280	280	280	
E	0.9~1.0	210	280	210	
F	1.0~1.3	170	280	170	
G	1.3~1.5	190	260	190	
H	1.5~2.0	170	270	190	

Titanium+PFA lining available on request

(Dimension will be changed. Consult factory for details.)

FM-1280


Made of Fluorocarbon resin for low pressure and moderate temperature

This series of gauges is made of fluorocarbon resin and other anti-corrosive materials.


AVAILABLE RANGES OF PRODUCTS

- Range : Min. 0~250mm
Max. 0~3500mm *1
- Max. Press. : F.V. ~0.2MPa
- Temp. range : 0°C≤t≤100°C
- Details of lining
PTFE lining : FM-128 □ Lining thickness 2 mm
: 3mm for vacuum application
- *1: Max. 2500mm for vacuum application

DIMENSIONS

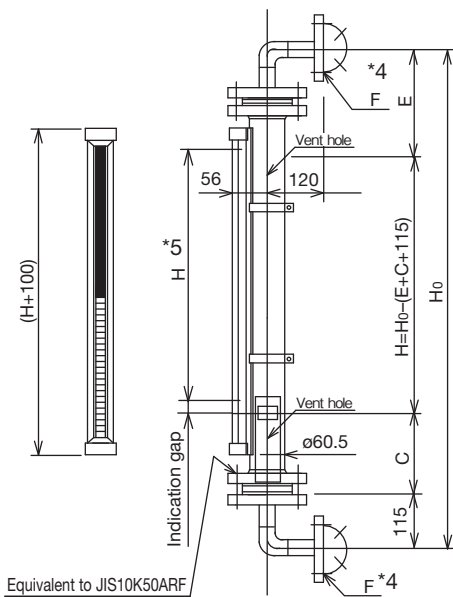

INDICATOR INSTALLATION ANGLE

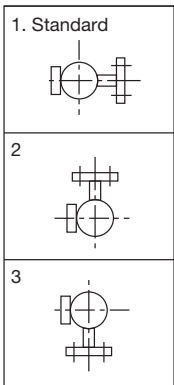

* Vent holes are arranged on the metal tube. Do not fill them with paint or heat insulator. Keep vent holes away from rain water and condensation. If gas penetrating the lining dissolves into any water, it may corrode the metal tube.

MODEL CODE

		—	12		—	Description
Flapper pitch	FM					10mm(Accuracy ± 15mm)
Chamber material			8			PTFE lining
Density range (g/cm³) Float material		A				0.72~0.75
		B				0.75~0.8
		C				0.8~0.9
		E				0.9~1.0
		F				1.0~1.3
		G				1.3~1.5
		H				1.5~2.0
		9				—
Connection flange rating *2						1 25A JIS 10K
						2 1" ANSI(JPI)#150
						9 Special

- *2 The flange face of lining type is equivalent to the raised face of flange.
- *3 The float for vacuum services is made of either stainless steel or titanium lined by ETFE.
- *4 Connection F
- *5 Measuring range H

FLOAT AVAILABILITY AND SIZES

No.	Density (g/cm³)	Design			Float
		C	E	L	
A	0.72~0.75	400	260	400	
B	0.75~0.8	350	260	345	
C	0.8~0.9	280	270	280	
E	0.9~1.0	210	270	210	
F	1.0~1.3	170	270	170	
G	1.3~1.5	190	260	190	
H	1.5~2.0	190	270	190	

- * Titanium+PFA lining available on request (Dimension will be changed. Consult factory for details.)
- * Vacuum application of PTFE, dimension will be changed.


FM-1410, 1420, 1430, 14Z0

Metallic type for high pressure and moderate temperature


AVAILABLE RANGES OF PRODUCTS

Range : Min. 0~250mm
 Max. 0~4380mm
 Max. Press. : See the table below.
 Temp. range : $-10^{\circ}\text{C} \leq T \leq 120^{\circ}\text{C}$ (Select FM-1800 for a temperature of $t < -10^{\circ}\text{C}$ and $120^{\circ}\text{C} < t$)

DIMENSIONS

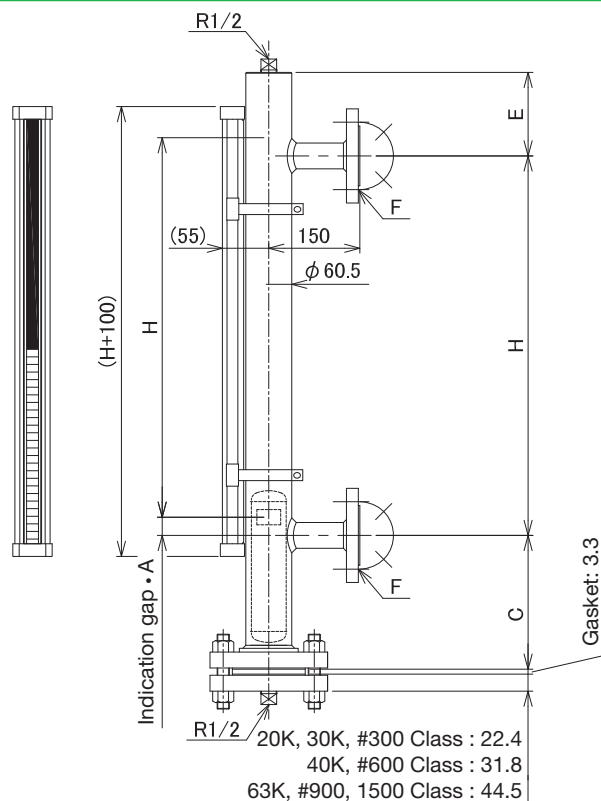

INDICATOR INSTALLATION ANGLE

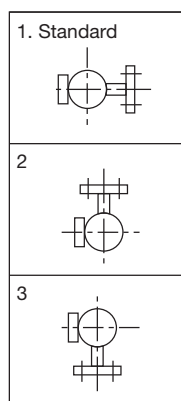

Allowable measurement temperature and pressure
 Float No. A to E, 1 to 6 Can withstand full vacuum.

T (°C)	-10	0	25	50	75	100	120
P (MPa)	13.2	13.2	13.2	12.8	11.9	11.1	10.7

MODEL CODE

FM-14		-	Description
Chamber material	1		SUS304
	2		SUS316
	3		SUS316L
	Z		Special
Density range (g/cm ³) Float materia	A	$0.52 \leq \rho < 0.54$	Ti-6Al-4V (titanium alloy) ★ For low-viscosity (water-equivalent) liquids
	B	$0.54 \leq \rho < 0.57$	
	C	$0.57 \leq \rho < 0.61$	
	D	$0.61 \leq \rho < 0.69$	
	E	$0.69 \leq \rho < 0.85$	
	F	$0.85 \leq \rho < 1.20$	
	1	$0.59 \leq \rho < 0.61$	Ti-6Al-4V (titanium alloy) ■ For high-viscosity (oil-equivalent) liquids
	2	$0.61 \leq \rho < 0.65$	
	3	$0.65 \leq \rho < 0.70$	
	4	$0.70 \leq \rho < 0.80$	
	5	$0.80 \leq \rho < 1.00$	
	6	$1.00 \leq \rho < 1.40$	
	Z		Special
Connection angle rating	1		25A JIS 40KRF
	2		1" JPI 600#RF
	3		1" ANSI 600#RF
	4		25A JIS 63KRF
	5		1" JPI 900#RF
	6		1" ANSI 900#RF
	9		Special

Titanium alloys are susceptible to hydrogen embrittlement in a hydrogen atmosphere.

FLOAT AVAILABILITY AND SIZES

No.	Density ρ (g/cm ³)	Design			Float	
		C	E	L	Float ★ For low-viscosity liquids	Float ■ For high-viscosity liquids
A	$0.52 \leq \rho < 0.54$	715	200	756		
B	$0.54 \leq \rho < 0.57$	615	200	655		
C	$0.57 \leq \rho < 0.61$	515	200	554		
D	$0.61 \leq \rho < 0.69$	420	200	453		
E	$0.69 \leq \rho < 0.85$	315	200	352		
F	$0.85 \leq \rho < 1.20$	215	200	250		
1	$0.59 \leq \rho < 0.61$	710	200	760		
2	$0.61 \leq \rho < 0.65$	615	200	659		
3	$0.65 \leq \rho < 0.70$	515	200	558		
4	$0.70 \leq \rho < 0.80$	420	200	457		
5	$0.80 \leq \rho < 1.00$	320	200	356		
6	$1.00 \leq \rho < 1.40$	215	200	254		
Z	Special	-	-	-		

FM-1610, 1620, 1630, 16Z0

Metallic type for low pressure and high temperature

FM-1600 is a series of metal tube level gauge for high temperature with stainless steel chamber and float (titanium float for low density applications).

AVAILABLE RANGES OF PRODUCTS

Range : Min. 0~250mm
Max. 0~4380mm

Temp. Range and Max. Press.

SUS316 & 316L Float: $-196 \leq t \leq +400^{\circ}\text{C}$, $FV \leq P < 1.35\text{MPa}$

TP340 Float: $-196 \leq t \leq +250^{\circ}\text{C}$, $FV \leq P < 0.68\text{MPa}$

SUS316 & 316L Float (Gas Sealed): $-196 \leq t \leq +225^{\circ}\text{C}$, $FV \leq P \leq 2\text{MPa}$

TP340 Float (Gas Sealed): $-196 \leq t \leq +175^{\circ}\text{C}$, $FV \leq P \leq 1.6\text{MPa}$

Indicator Specifications

$-10 \leq t \leq +350^{\circ}\text{C}$: Standard type


$-196 \leq t \leq +150^{\circ}\text{C}$: Sealed type

$350^{\circ}\text{C} < t$: Indicator glass

Caution


Alarm and 4-20mA output have individual temperature limits.

DIMENSIONS

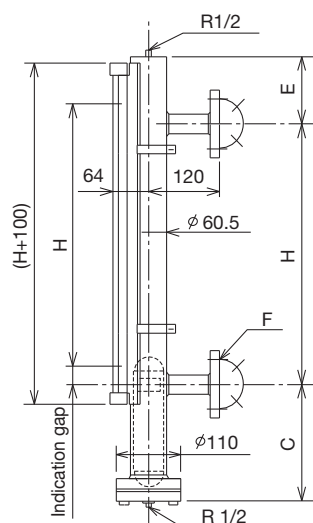


* Dimension will be changed.
Consult factory for details.

INDICATOR INSTALLATION ANGLE

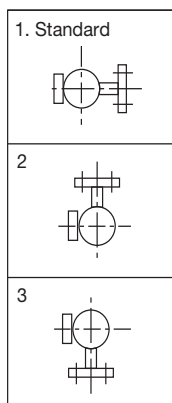

Heating / thermal insulation are to be conducted onto chamber portion only.




MODEL CODE

FM-16			—		Description	
Chamber material	1				SUS304	
	2				SUS316	
	3				SUS316L	
	Z				Other	
Density range (g/cm³) Float material		A			0.39~0.45	TP340 Titanium
		0			0.44~0.52	
		1			0.5~0.6	
		2			0.55~0.7	
		3			0.62~0.8	SUS316 or SUS316L
		P			0.65~0.8	
		5			0.7~0.9	
		6			0.8~1.0	
		7			0.9~1.4	
		8			1.0~1.5	
Connection flange rating		—	0	25A JIS 10KFF		
		—	1	25A JIS 10KRF		
		—	2	1" JPI 150# RF		
		—	3	1" ANSI 150# RF		
		—	4	25A JIS 20KRF		
		—	5	1" JPI 300# RF		
		—	6	1" ANSI 300# RF		
		—	7	25A JIS 5KFF		
		—	8	Other 1"(25mm) flanges		
		—	9	Special		


FLOAT AVAILABILITY AND SIZES

No.	Density (g/cm ³)	Design		Float	
		C	E	Material	L
A	0.39~0.45	620	200	TP340 Titanium *0.68MPa	650
0	0.44~0.52	490	200		520
1	0.5~0.6	390	200		410
2	0.55~0.7	340	200		360
3	0.62~0.8	290	200		300
P	0.65~0.8	460	170	SUS316 or SUS316L *(1.35MPa)	460
5	0.7~0.9	400	170		400
6	0.8~1.0	300	150		300
7	0.9~1.4	260	150		260
8	1.0~1.5	230	130		230



* Consult factory for details when max. press. exceeds these value.


Support

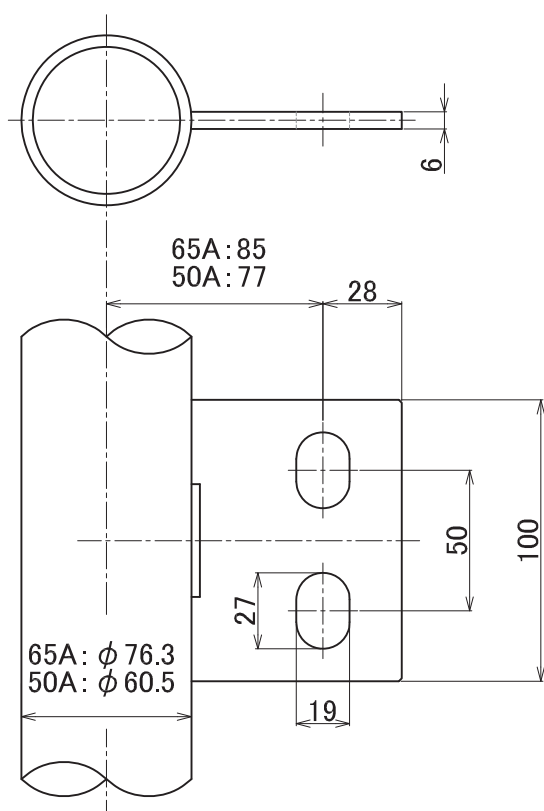


- A support is provided when the face-to-face dimension is 2500 mm or more.
 - The support material is 304SS.
 - Mounting holes on a support are designed for M16 bolts.
- If M16 bolts are not applicable, M12 bolts can be used instead with plain washers of 12 nominal diameter.

Height scale plate (the scale plate is optional)

Example: For 1000 mm measurement range (left-side mounting)

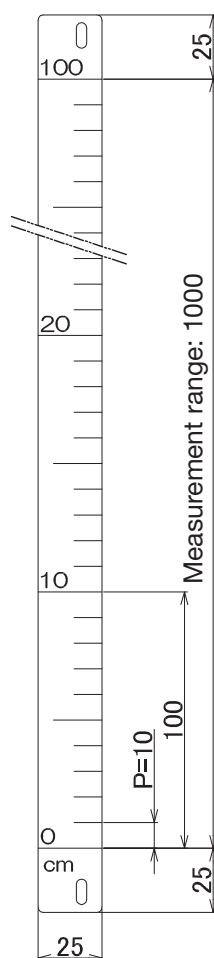

Material: SUS304
Plate thickness: $t = 1.5$
Background color: White
Font color: Black
Character size: 6
Scale: Black



Example of character size

- Standard: Left-side mounting
- When the gauge has a scale plate, the indicator is yellow at 10 mm intervals only.
- When using a capacity scale plate, a tank table is required to indicate both capacity and liquid level.

Indicator


Indicator window glass: A single indicator can cover a measurement range of up to 800 mm.

For ranges exceeding this, the indicator is split, resulting in an unmeasurable zone of approximately 30 mm, as shown in the illustration below.


Sealed type

: A single indicator can cover a measurement range of up to 2900 mm.

For ranges exceeding this, the indicator is split, resulting in an unmeasurable zone of approximately 60 mm, as shown in the illustration below.

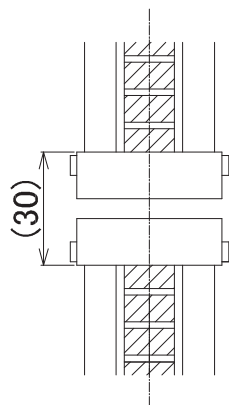

Indicator window glass

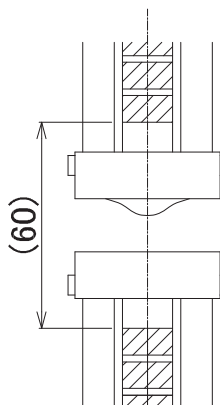

Sealed type

ADD-ON ALARM CONTACTS

Alarm contact (s) can be provided to all FM Mag Gauges.
A reed switch is located at side portion of chamber which is actuated by the magnet in float. Watertight, Intrinsically safe as well as Flameproof versions are available.

MODEL CODE OF ALARM CONTACTS

FM-□□□-□567/□□□□

FM-1	5	6	7	
Enclosure	W			Watertight (Non-explosion proof)
	E			EX-d, Flameproof
	S			EX-i, Intrinsically safe
Contact				No. of contact
Terminal box				No. of terminal box

SPECIFICATION




- Watertight version (FM-□□□-□W□□)
 - Type of contact : 1 X SPST(Self-holding contact)
 - Contact capacity : 10W, AC/DC
 - Max. voltage ; AC,DC 100V
 - Fluid temp. : -10~200°C
 - Ambient temp. : -10~60°C
 - Enclosure : Watertight
 - No. of contact : Depending on the length of chamber (No limitation)
 - Repeatability : ±15mm (Equivalent to indicator accuracy)
 - Reset span : Max. 30mm (Fixed)
 - Alarm action : High or Low (To be specified. Also at field adjustable)
 - Setting range : 50mm (70 mm between H-L)
 - Min. gap between points : 50mm (Shorter gap on request)
 - Accessory : Surge suppressor intergrated (It is not attached to IS version)
 - Terminal box : The cable from a reed switch is drawn and it is used for terminal connection.
 - Installed terminal : 8P, M3.5 screws
 - Cable entries : For alarm switches
 - 4 entries with packing type cable gland, Max. cable dia. 7 mm
 - For alarm outlet 1 X G3/4 (Female)
 - Construction : Splash-proof construction
 - Protection rating : IP66&IP67

Note 1: When installing the insulating material, do not install it around the alarm sensor.



- Intrinsically safe version (FM - □□□ -□S □□)
 - A safety relay is inserted into the contact loop of watertight version to achieve Intrinsically safe loop.

IS classification : Ex ia IIC T6
(Subject to using of specified safety relay)

Dimension of Safety Relay EB3C-R01A (1 point use)

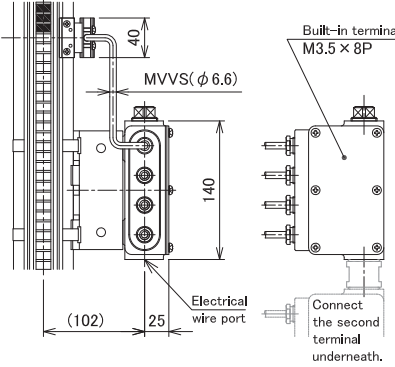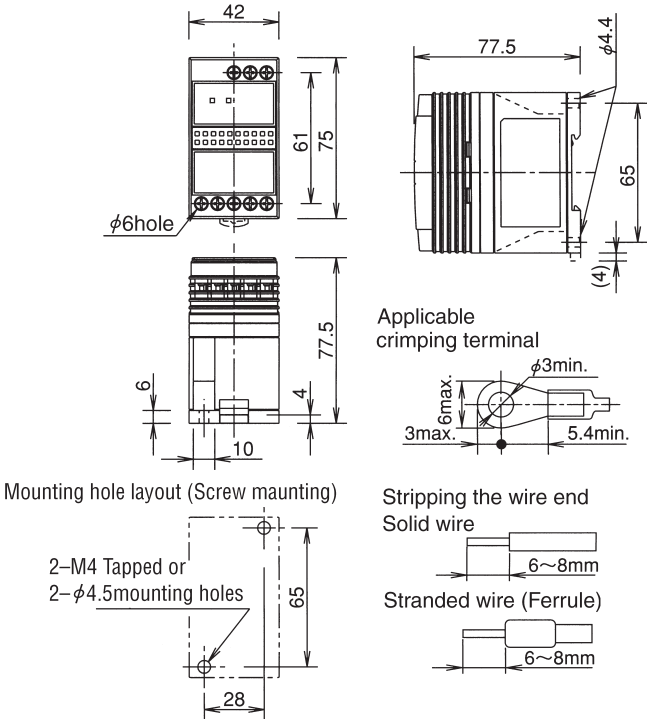

No.	Part	Material	Exterior
①	Switch body	A6063P	Anodized aluminum
②	Cable	PVC	---
③	Terminal box (case)	AC2A	Painted silver (polyurethane resin)
④	Terminal box (cover)	SUS304	Unpainted
⑤	Bracket	SUS304	Unpainted



● Flameproof enclosure version (FM-1□□□- □E□□)

Individual reed switch and terminals are capcellated in one pressure tight housing for each alarm contact.

Construction : Flameproof enclosure (d2G5) (No. T49972)

Type of contact : SPST (Self-holding contact)

Contact capacity: 10W, AC/DC

Max. voltage ; AC,DC 100V

No. of contact : Depending on the length of chamber
(No limitation)

Repeatability : $\pm 15\text{mm}$
(Equivalent to indicator accuracy)

Reset span : Max. 30mm (Fixed)

Alarm action : High or Low (To be specified.)

Setting range : From 100 mm above lower end to 100 mm
below upper end

Min. gap between points :
250mm (Shorter gap on request)

Fluid temp. : $-10\sim 200^{\circ}\text{C}$

Amb. temp. : $-10\sim 60^{\circ}\text{C}$

Accessory : Surge suppressor integrated

Built-in terminal : 2P (M3)

Installation : Clamping onto chamber

Cable entry : 1XG1/2 (Female)
Compatible cable outer diameter for the included
cable gland (flameproof version)
Built-in gasket: 10.0 to 10.9 mm
Spare gaskets: 9.0 to 9.9 mm, 11.0 to 12.0 mm
Custom-made gaskets for 7.0 to 7.9 mm and 8.0
to 8.9 mm are also available.


Flameproof model is approved only when used
with the specified cable gland (SXBM-16B :
Shimada ElectricCo.,Ltd.). Therefore, you must
use this cable gland.

When connecting an adapter, install the adapter
behind the cable gland.

Protection rating : IP66

CASE Material : AC2A

Exterior : Silver paint (polyurethane resin)

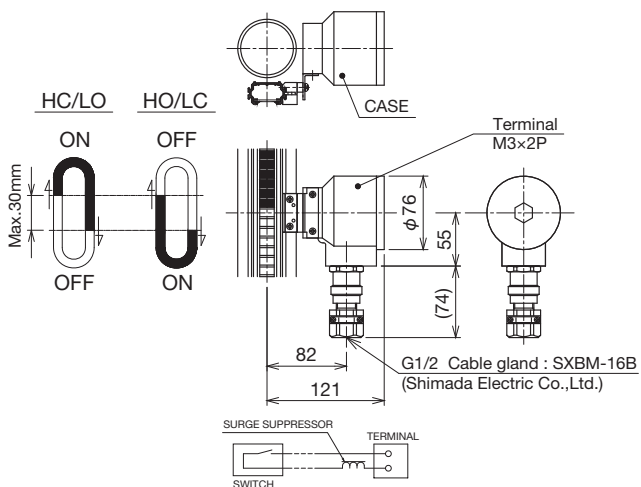

ADD-ON CURRENT LEVEL TRANSMITTER

The 4 to 20mA 2-wire current transmitter can be additionally provided for all types of FM-1000 Mag Gauge even together with alarm contact (s).

Watertight, Intrinsically safe and Flameproof versions are available to meet area classification.

MODEL CODE OF ANALOG TRANSMITTER

FM-1	8	9	10	
Enclosure	W			Watertight
	E			Flameproof
	S			Intrinsically safe
Direction of sensor	R			Right hand side
	L			Left hand side
Direction of Converter		R		Right hand side
		L		Left hand side

SPECIFICATION

Output span : Min. 0~250mm
Max. 0~4380mm
(Shorter output span than measuring range on request)

Enclosure : 1) Watertight
FM-1□□□ - □□□□/ W□□
2) Flameproof
FM-1□□□ - □□□□/ E□□
Ex d IIB T6, RIIS certification No. TC14720
3) Intrinsically safe
FM-1□□□ - □□□□/ S□□
Ex ia IIC T4, RIIS certification No. TC16354

Protection rating : Flameproof: IP66
Watertight, Intrinsic safety: IP66 & IP67

Fluid temp. : -20~200°C

Amb. temp. : -20~55°C

Power supply : Nominal DC24V

Built-in terminal : 2P (M3)

Cable entry : 1 x G3/4 (Female)

Max. load resistance

Watertight (W) 600Ω

Flameproof (E) 600Ω

Intrinsically safe construction (600 – Resistance inside barrier)Ω

For MTL7728+: 600 - 333 = 267Ω

For MTL7787+: 600 - 359 = 241Ω

(Cautions)

When using an MTL7728+ barrier for this intrinsically safe transmitter, the load must be connected to the positive (+) terminal, because the negative (-) terminal is grounded.

When the load cannot be connected to the positive terminal, use of an MTL7787+ barrier is recommended.

Output accuracy : $\pm(0.2 + \frac{10}{H} \times 100)\%$ F.S.


H : Measuring range(mm)

Resolution : 5 mm


If the detector does not detect magnetic force, the unit outputs 26 mA or more.

DIMENSION

Watertight (W) and Intrinsically safe (S)

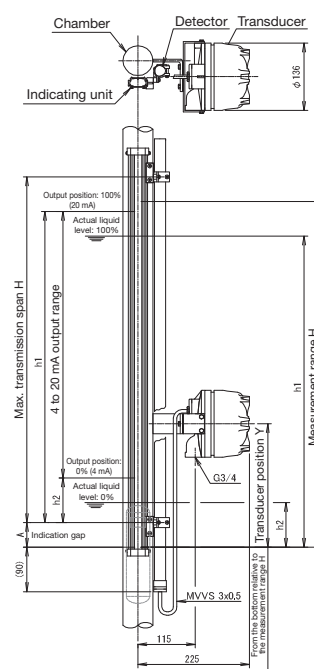

Flameproof version (E)

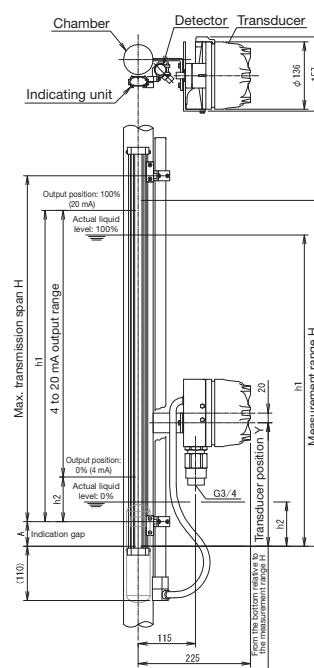

Note 1: The transmitter (4 to 20mA) shall be replaced or readjusted after returning to Tokyo Keiso.

Note 2: When installing the insulating material, do not install it around the detector.

Note 3: Compatible cable outer diameter for the included cable gland (flameproof version): 12.0 to 13.9 mm
The flameproof enclosure is approved only when combined with the specified cable gland (SXC-22B by Shimada Electric Co., Ltd.); always use this cable gland. If an adapter is attached, install it behind the cable gland. Use a cable recommended for explosionproof wiring, such as a control cable (JIS C3401) or one with similar specifications. Perform waterproof treatment by applying non-hardenable sealant, such as a liquid gasket, to the connection of the cable gland and the gauge.

Typical specification sheet

Use following sheet for your inquiry or ordering

Model code	FM-1□□□-□□□□ / □□□			Quantity	
Fluid		Density		Viscosity	
Pressure	MPa		Temperature	°C	
Measuring span (measuring range)	mm		Connection flange size and rating		
Other requirements					

* Specification is subject to change without notice.


TOKYO KEISO CO., LTD.

Head Office : Shiba Toho Building, 1-7-24 Shibakoen, Minato-ku, Tokyo 105-8558

Tel : +81-3-3431-1625 (KEY) ; Fax : +81-3-3433-4922

e-mail : overseas.sales@tokyokeiso.co.jp ; URL : <https://www.tokyokeiso.co.jp>