



TECHNICAL GUIDANCE

FCX-AIII Series

FKP...5

PRESSURE TRANSMITTER (DIRECT MOUNT TYPE)

OUTLINE

The FCX-AIII pressure transmitter accurately measures gauge pressure and transmits proportional 4 to 20mA signal. The transmitter utilizes the unique micromachined capacitive silicon sensor with state-of-the-art microprocessor technology to provide exceptional performance and functionality.

FEATURES

- High accuracy $\pm 0.1\%$**
0.1% accuracy is a standard feature.
- Minimum environmental influence**
The "Advance Floating Cell" design which protects the pressure sensor against changes in temperature, and overpressure substantially reduces total measurement error in actual field applications.
- HART® bilingual communications protocol**
FCX-AIII series transmitter offers bilingual communications to speak both proprietary protocol and HART®. Any HART® compatible devices can communicate with FCX-AIII.
- Application flexibility**
Various options that render the FCX-AIII suitable for almost any process applications include:
 - Full range of hazardous area approvals
 - Built-in RFI filter and lightning arrester
 - 5-digit LCD meter with engineering unit
- Burnout current flexibility (Under Scale: 3.2 to 4.0mA, Over Scale: 20.0 to 22.5mA)**
Burnout signal level is adjustable using Model FXW Hand Held Communicator (HHC) to comply with NAMUR NE43.
- Dry calibration without reference pressure**
Thanks to the best combination of unique construction of mechanical parts (Sensor unit) and high performance electronics circuit (Electronics unit), reliability of dry calibration without reference pressure is at equal level as wet calibration.



SPECIFICATIONS

Functional specifications

Service: Liquid, gas, or vapor

Span, range and overrange limit:


Type	Span limit [kPa] {bar}		Range limit [kPa] {bar}	Overrange limit [MPa] {bar}
	Min.	Max.		
FKP □ 01	8.125 {0.08125}	130 {1.3}	-100 to +130 {-1 to +1.3}	1 {10}
FKP □ 02	31.25 {0.3125}	500 {5}	-100 to +500 {-1 to +5}	1.5 {15}
FKP □ 03	187.5 {1.875}	3000 {30}	-100 to +3000 {-1 to +30}	9 {90}
FKP □ 04	625 {6.25}	10000 {100}	-100 to +10000 {-1 to +100}	15 {150}

- Lower range limit (vacuum limit) is;
 - Silicone fill sensor: See Fig. 1
 - Fluorinated fill sensor: 66kPa abs (500mmHg abs) at below 60°C

Output signal: 4 to 20mA DC with digital signal superimposed on the 4 to 20mA signal.

Power supply: Transmitter operates on 10.5V to 45V DC at transmitter terminals.
10.5V to 32V DC for the units with optional arrester.

Load limitations: see figure below

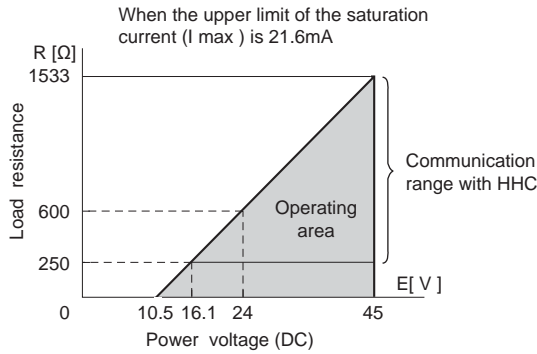

Note) The load resistance varies with the upper limit of the saturation current [I max]

$$R [\Omega] = \frac{E [V] - 10.5}{(I_{max} [mA] + 0.9) \times 10^{-3}}$$

Note: For communication with HHC⁽¹⁾ (Model: FXW), min. of 250 Ω required.

Hazardous locations: SEE TABLE3

Zero/span adjustment:

Zero and span are adjustable from the HHC⁽¹⁾. Zero and span are also adjustable externally from the adjustment screw.

Damping: Adjustable from HHC or local configurator unit with LCD display.

The time constant is adjustable between 0.06 to 32 seconds.

Zero elevation/suppression:

Zero can be elevated or suppressed within the specified range limit of each sensor model.

Normal/reverse action:

Selectable from HHC⁽¹⁾.

Indication: Analog indicator or 5-digit LCD meter, as specified.

Burnout direction: Selectable from HHC⁽¹⁾

If self-diagnostic detect transmitter failure, the analog signal will be driven to either "Output Hold", "Output Overscale" or "Output Underscale" modes.

"Output Hold":


Output signal is hold as the value just before failure happens.

"Output Overscale":

Adjustable within the range 20.0mA to 22.5mA from HHC⁽¹⁾

"Output Underscale":

Adjustable within the range 3.2mA to 4.0mA from HHC

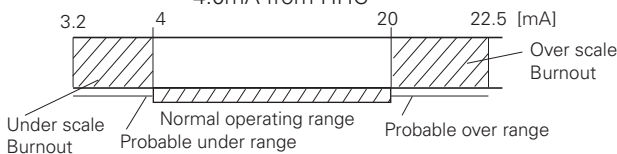

Output limits conforming to NAMUR NE43 by order.

Loop-check output:

Transmitter can be configured to provide constant signal 3.2mA through 22.5mA by HHC.

Temperature limit:

Ambient: -40 to +85°C

(-20 to +80°C for LCD indicator)

(-40 to +60°C for arrester option)

(-10 to +60°C for fluorinated oil fill transmitter)

For explosionproof units (flameproof or intrinsic safety), ambient temperature must be within the limits specified by each standard.

Process: -40 to +100°C for silicone fill sensor

-20 to +80°C for fluorinated oil fill sensor

Storage: -40 to +90°C

Humidity limit: 0 to 100% RH

Communication: With HHC⁽¹⁾ (Model FXW), following items can be remotely displayed or configured.

Note: HHC's version must be higher than 7.0 (or FXW □□□□1-□4), for FCX-AIII.

Local configurator with LCD display (option):

Local configurator with 3 push button and LCD display can support following items.

Items	By communication with FXW		By local configurator (with 3 push button)	
	Display	Set	Display	Set
Tag No.	✓	✓	✓	✓
Model No.	✓	✓	✓	✓
Serial No. & Software Version	✓	—	✓	—
Engineering unit	✓	✓	✓	✓
Range limit	✓	—	✓	—
Measuring range	✓	✓	✓	✓
Damping	✓	✓	✓	✓
Output mode	✓	—	✓	—
Burnout direction	✓	✓	✓	✓
Calibration	✓	✓	✓	✓
Output adjust	—	✓	—	✓
Data	✓	—	✓	—
Self diagnoses	✓	—	✓	—
Printer (In case of FXW with printer option)	✓	—	—	—
External switch lock	✓	✓	✓	✓
Transmitter display	✓	✓	✓	✓
Linearize	✓	✓	—	—
Rerange	✓	✓	✓	✓
Saturate current	✓	✓	✓	✓
Write protect	✓	✓	✓	✓
History				
- Calibration history	✓	✓	✓	✓
- Ambient temperature history	✓	—	✓	—

(Note) (1) HHC: Hand Held Communicator

Performance specifications

Accuracy rating: (including linearity, hysteresis, and repeatability)
 For spans greater than 1/10 of URL:
 $\pm 0.1\%$ of span
 For spans below 1/10 of URL :
 $\pm (0.05 + 0.05 \frac{0.1 \times \text{URL}}{\text{span}})$ % of span

Stability: $\pm 0.2\%$ of upper range limit (URL) for 10 years (In case of 6th digit code "2", "3", "4")

Temperature effect:
 Effects per 55°C change between the limits of - 40°C and +85°C
 Zero shift :
 $\pm (0.4 + 0.1 \frac{\text{URL}}{\text{span}}) \%/28^\circ\text{C}$
 Total effect:
 $\pm (0.475 + 0.1 \frac{\text{URL}}{\text{span}}) \%/28^\circ\text{C}$

Overrange effect: Zero shift, 0.3% of URL for any overrange to maximum limit

Supply voltage effect:
 Less than 0.05% of calibrated span per 10V

Update rate: 60 msec

Step response: Time constant: 0.08s (at 23°C)
 Dead time: about 0.12s (without electrical damping)

Mounting position effect:
 Zero shift, less than 0.1kPa {1mbar} for a 10° tilt in any plane.
 No effect on span. This error can be corrected by adjusting zero.
 (Double the effect for fluorinated fill sensors)

Dielectric strength:
 500V AC, 50/60Hz 1 min., between circuit and earth

Insulation resistance:
 More than 100MΩ at 500V DC

Internal resistance for external field indicator:
 12Ω or less.

Physical specifications

Electrical connections:
 G1/2, 1/2-14 NPT, Pg13.5, or M20×1.5 conduit, as specified.

Process connections:
 1/2-14NPT, Rc1/2, Rc1/4 or 1/4-18NPT, as specified.

Process-wetted parts material:

Material code (7th digit in "Code symbols")	Process cover	Diaphragm	Wetted sensor body
V	316 stainless steel	316L stainless steel	316L stainless steel

Non-wetted parts material:

Electronics housing: Low copper die-cast aluminum alloy (standard), finished with polyester coating.
 Fill fluid: Silicone oil (standard) or fluorinated oil (Daifloil)
 Mounting bracket: 304 stainless steel

Environmental protection:
 IEC IP67 and NEMA 6/6P

Mounting:
 On 60.5mm (JIS 50A or 2B) pipe using mounting bracket, direct wall mounting, or direct process mounting.

Mass{weight}:
 Transmitter approximately 2.2kg without options.
 Add; 0.5kg for mounting bracket

Optional features

- Indicator:** A plug-in turnable analog indicator (2.5% accuracy)
An optional 5digits LCD meter with engineering unit is also available.
- Local configurator with LCD display:** An optional 5 digits LCD meter with 3 push buttons can support items as using communication with FXW.
- Arrester:** A built-in arrester protects the electronics from lightning surges.
Lightning surge immunity:
4kV (1.2 x 50 μs)
- Oxygen service:** Special cleaning procedures are followed throughout the process to maintain all process wetted parts oil-free.
The fill fluid is fluorinated oil.
- Degreasing:** Process-wetted parts are cleaned, but the fill fluid is standard silicone oil. Not for use for oxygen or chlorine measurement.
- Optional tag plate:** An extra stainless steel tag with customer tag data is wired to the transmitter.

ACCESSORIES

Hand held communicator: Model FXW

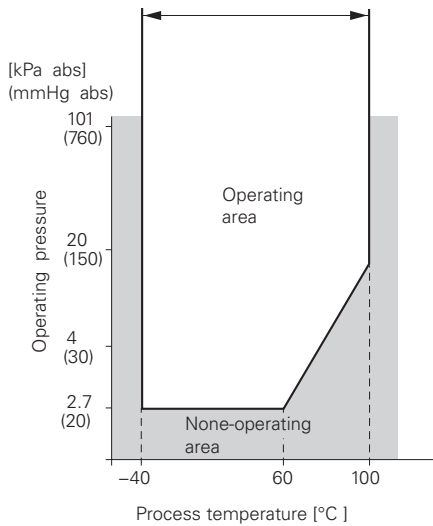



Fig. 1 Relation between process temperature and operating pressure

CODE SYMBOLS


Digit	Description	Note	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	← Digit No. of code	
4	<Connections>		F	K	P	0	5												
	Process connection	Conduit connection	Case type																
	1/2-14NPT	G1/2	T type																
	1/2-14NPT	1/2-14NPT	T type																
6	 FKP kPa {bar}																		
	8.125 ... 130 {0.08125 ... 1.3}																		
	31.25 ... 500 {0.3125 ... 5}																		
	187.5 ... 3000 {1.875 ... 30}																		
7	<Material>																		
	Process cover	Diaphragm	Wetted cell body																
9	<Indicator and arrester>																		
	Indicator	Arrester																	
	None	None									A								
	Analog, 0 to 100% linear scale	None									B								
	Analog, custom scale	None									D								
	None	Yes									E								
	Analog, 0 to 100% linear scale	Yes									F								
	Analog, custom scale	Yes									H								
	Digital, 0 to 100% linear scale	None									L								
	Digital, custom scale	None									P								
	Digital, 0 to 100% linear scale	Yes									Q								
	Digital, custom scale	Yes									S								
	Digital, 0 to 100% linear scale (Local configurator unit with LCD display)	None									1								
	Digital, Custom scale (Local configurator unit with LCD display)	None									2								
Digital, 0 to 100% linear scale (Local configurator unit with LCD display)	Yes									4									
Digital, Custom scale (Local configurator unit with LCD display)	Yes									5									
10	<Approvals for hazardous locations>																		
	None (for ordinary locations)																		
	TIIS, Flameproof (Cable gland seal) (*1)	Note 1									A								
	TIIS, Intrinsic safety										C								
	FM, Flameproof (or explosionproof) (*2)	Note 2									D								
	FM, Intrinsic safety and nonincensive										H								
	FM Combined of flameproof and intrinsic safety (*2)	Note 2									V								
	ATEX Flameproof (*3)	Note 3									X								
	ATEX Intrinsic safety										K								
	ATEX Type n										P								
ATEX Combined of flameproof and intrinsic safety (*3)	Note 3									M									
IECEX Scheme, Flameproof (*3)	Note 3									R									
IECEX Scheme, Intrinsic safety										T									
CSA, Flameproof (or explosionproof) (*2)	Note 2									E									
CSA, Intrinsic safety and nonincensive										J									
11	<Mounting bracket>																		
	None																		
12	<Optional specification>																		
	Stainless tag																		
13	<Special application and fill fluid>																		
	Treatment	Filled liquid																	
	None (standard)	Silicon oil																	
14	<Process connection>																		
	1/2 -14NPT																		
15	<Fixed code> (*5)	Note 5																*	

Note 1: (*1) Available for 4th digit code "5".
 Note 2: (*2) Available for 4th digit code "6".
 Note 3: (*3) Available for 4th digit code "6", "8".
 Note 4: (*4) Customer tag number can be engraved on standard stainless steel name plate. If extra tag plate is required select "Yes".
 Note 5: (*5) In case of hazardous location type, tagplate is made by Fuji Electric Co., Ltd.


OUTLINE DIAGRAM (Unit:mm)

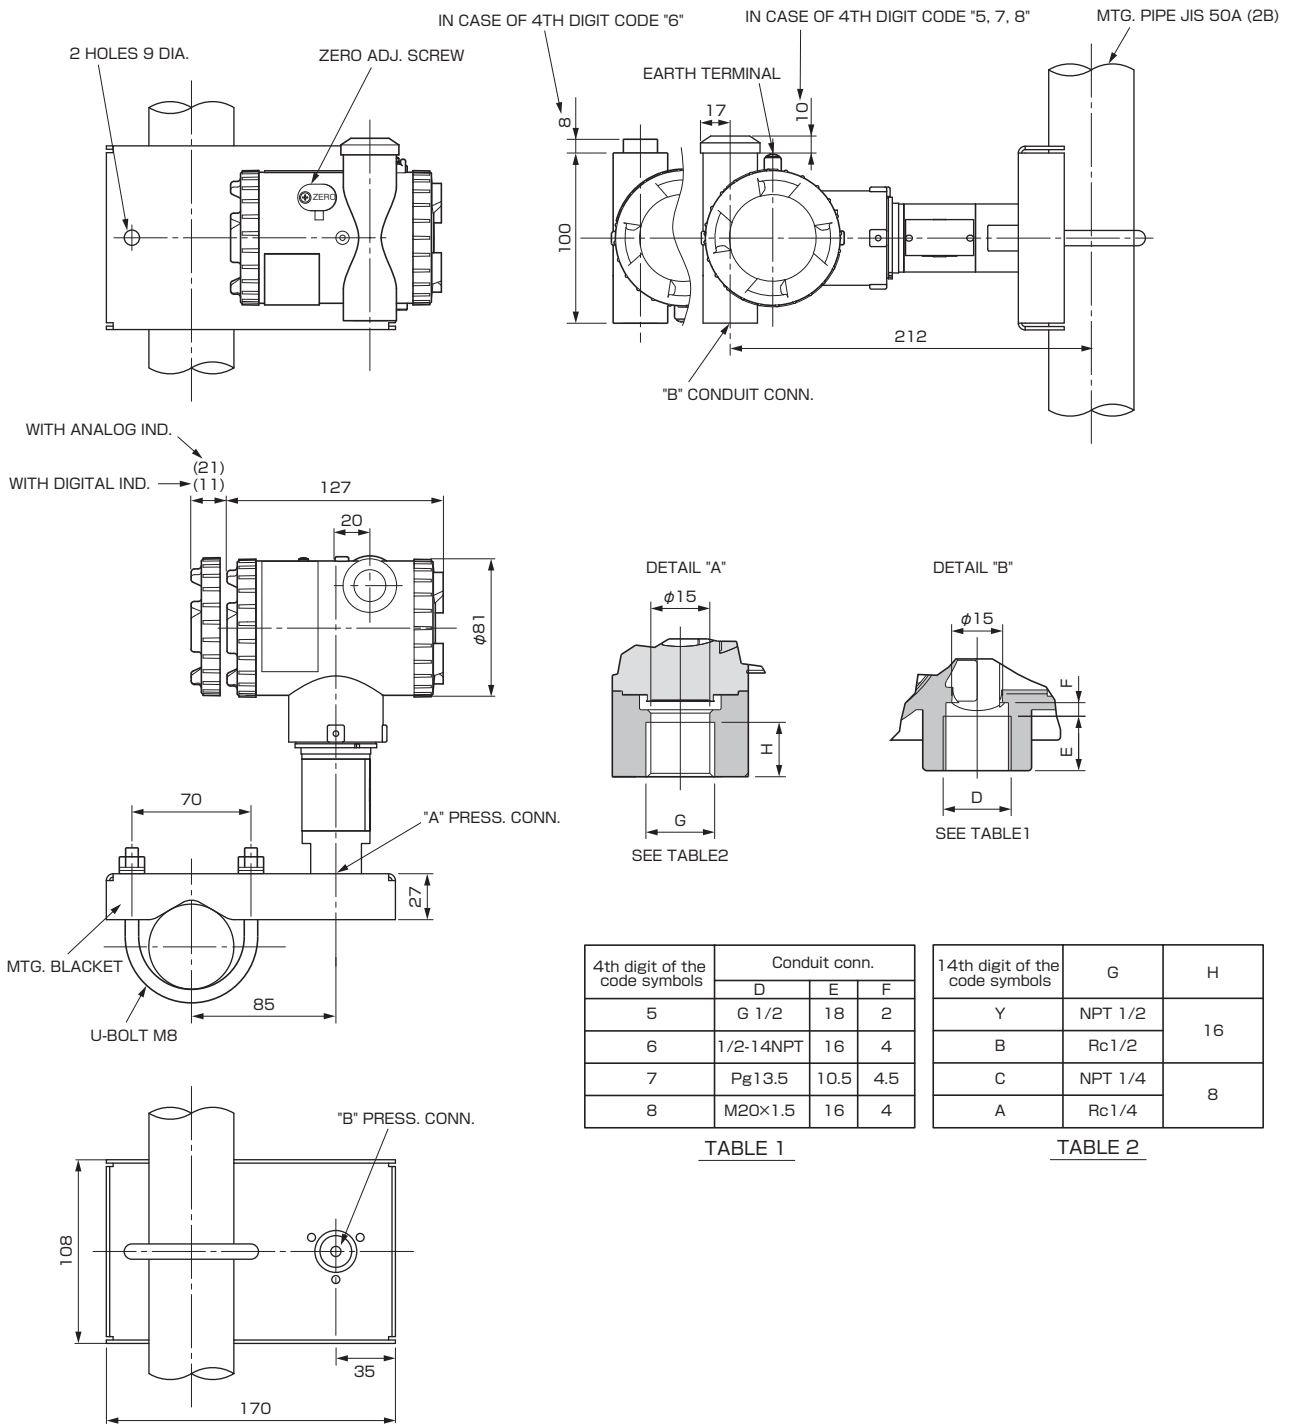

CONNECTION DIAGRAM



<SS TAG PLATE>



OPTION PARTS FOR FLAMEPROOF OF TIIS (JAPAN)

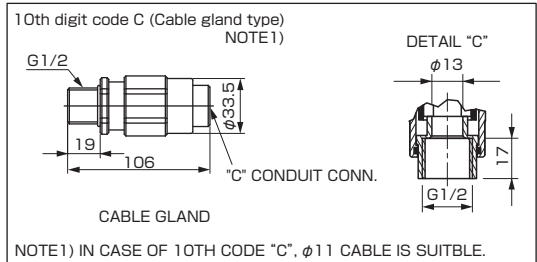


TABLE 3

Authorities	Intrinsic safety																				
ATEX	Ex II 1 G Ex ia IIC T5 Tamb = -40°C to +50°C Ex ia IIC T4 Tamb = -40°C to +70°C Entity Parameters: Ui=28V, li=94.3mA, Pi=0.66W, Ci=26nF (Without Arrester), Li=0.6mH (Without analog indicator), Ci=36nF (With Arrester), Li=0.7mH (With analog indicator)																				
Factory Mutual	Class I II III Div.1 Groups A, B, C, D, E, F, G T4 Entity Type 4X <table border="1"> <thead> <tr> <th colspan="2">Model code</th> <th rowspan="2">Tamb</th> </tr> <tr> <th>9th digit</th> <th>13th digit</th> </tr> </thead> <tbody> <tr> <td>A,B,D</td> <td>Y,G</td> <td>-40°C to +85°C</td> </tr> <tr> <td>L,P,1,2</td> <td>Y,G</td> <td>-20°C to +80°C</td> </tr> <tr> <td>Q,S,4,5</td> <td>Y,G</td> <td>-20°C to +60°C</td> </tr> <tr> <td>E,F,H</td> <td>Y,G</td> <td>-40°C to +60°C</td> </tr> <tr> <td>-</td> <td>A</td> <td>-10°C to +60°C</td> </tr> </tbody> </table> Entity Parameters: Vmax=28V, Imax=94.3mA, Pi=0.66W, Ci=35.98nF, Li=0.694mH	Model code		Tamb	9th digit	13th digit	A,B,D	Y,G	-40°C to +85°C	L,P,1,2	Y,G	-20°C to +80°C	Q,S,4,5	Y,G	-20°C to +60°C	E,F,H	Y,G	-40°C to +60°C	-	A	-10°C to +60°C
Model code		Tamb																			
9th digit	13th digit																				
A,B,D	Y,G	-40°C to +85°C																			
L,P,1,2	Y,G	-20°C to +80°C																			
Q,S,4,5	Y,G	-20°C to +60°C																			
E,F,H	Y,G	-40°C to +60°C																			
-	A	-10°C to +60°C																			
CSA	Class I Div.1 Groups A, B, C, D Class II Div.1 Groups E, F, G Class III Div.1 Temp Code T5 Tamb max = +50°C Temp Code T4 Tamb max = +70°C Entity Parameters: Vmax=28V, Imax=94.3mA, Ci=25nF (Without Arrester), Ci=36nF (With Arrester), Li=0.6mH (Without analog meter), Li=0.7mH (With analog meter)																				
TIIS	Ex ia IIC T4 Tamb max = +60°C Entity Parameters: Ui=28V, li=94.3mA, Pi=0.66W, Ci=40.92nF, Li=0.694mH																				
IECEx Scheme	Ex ia IIC T4 Tamb = -40°C to +70°C Ex ia IIC T5 Tamb = -40°C to +50°C Entity Parameters: Ui=28V, li=94.3mA, Pi=0.66W, Ci=26nF (Without Arrester), Li=0.6mH (Without analog indicator), Ci=36nF (With Arrester), Li=0.7mH (With analog indicator)																				

Authorities	Flameproof																				
ATEX	Ex II 2 GD Ex d IIC T6 IP66/67 T85°C Tamb = -40°C to +65°C Ex d IIC T5 IP66/67 T100°C Tamb = -40°C to +85°C																				
Factory Mutual	Class I Div.1 Groups B, C, D T6 Type 4X Class II III Div.1 Groups E, F, G T6 Type 4X Tamb max = +60°C																				
CSA	Class I Div.1 Groups C, D Class II Div.1 Groups E, F, G Class III Div.1 Note) "Seal Not Required" enclosure is allowed.																				
IECEx Scheme	Ex d IIC T5 IP66/67 Tamb = -40°C to +85°C Ex d IIC T6 IP66/67 Tamb = -40°C to +65°C																				
TIIS	Ex do IIB+H ₂ T4 Tamb max = +60°C Maximum process temp. = +120°C																				
Authorities	Type n Nonincendive																				
ATEX	Ex II 3 GD EEx nL IIC T5 Tamb = -40°C to +50°C EEx nL IIC T4 Tamb = -40°C to +70°C Specific Parameters: Model without arrester: Ui=42.4V, li=113mA, Pi=1W, Ci=25.18nF, Li=0.694mH Model with arrester: Ui=32V, li=113mA, Pi=1W, Ci=35.98nF, Li=0.694mH EEx nAL IIC T5 Tamb = -40°C to +50°C EEx nAL IIC T4 Tamb = -40°C to +70°C Specific Parameters: Model without arrester: Umax=42.4V, Imax=113mA, Pmax=1W, Model with arrester: Umax=32V, Imax=113mA, Pmax=1W																				
Factory Mutual	Class I II III Div.2 Groups A, B, C, D, F, G T4 Entity Type 4X <table border="1"> <thead> <tr> <th colspan="2">Model code</th> <th rowspan="2">Tamb</th> </tr> <tr> <th>9th digit</th> <th>13th digit</th> </tr> </thead> <tbody> <tr> <td>A,B,D</td> <td>Y,G</td> <td>-40°C to +85°C</td> </tr> <tr> <td>L,P,1,2</td> <td>Y,G</td> <td>-20°C to +80°C</td> </tr> <tr> <td>Q,S,4,5</td> <td>Y,G</td> <td>-20°C to +60°C</td> </tr> <tr> <td>E,F,H</td> <td>Y,G</td> <td>-40°C to +60°C</td> </tr> <tr> <td>-</td> <td>A</td> <td>-10°C to +60°C</td> </tr> </tbody> </table>	Model code		Tamb	9th digit	13th digit	A,B,D	Y,G	-40°C to +85°C	L,P,1,2	Y,G	-20°C to +80°C	Q,S,4,5	Y,G	-20°C to +60°C	E,F,H	Y,G	-40°C to +60°C	-	A	-10°C to +60°C
Model code		Tamb																			
9th digit	13th digit																				
A,B,D	Y,G	-40°C to +85°C																			
L,P,1,2	Y,G	-20°C to +80°C																			
Q,S,4,5	Y,G	-20°C to +60°C																			
E,F,H	Y,G	-40°C to +60°C																			
-	A	-10°C to +60°C																			

* Specification is subject to change without notice.

***TK* TOKYO KEISO CO., LTD.**

Head Office : Shiba Toho Building, 1-7-24 Shibakoen, Minato-ku, Tokyo 105-8558
Tel : +81-3-3431-1625 (KEY) ; Fax : +81-3-3433-4922
e-mail : overseas.sales@tokyokeiso.co.jp ; URL : <https://www.tokyokeiso.co.jp>