

OUTLINE

The **NLZ series** is a compact, metal tube type variable area flowmeter with a face-to-face dimension of 250 mm.

This series consists of NLZ1000 (general type and intrinsically safe type) and NLZ2000 (flameproof type). Each model has various types including a local indication without power supply type and a fieldbus type. The NLZ series can measure flow rates of any processes and devices.

The standard material for the wetted parts is 316L stainless steel. Fluororesin lining is also available for highly corrosive fluids. As optional indicator and transmitter functions, alarm output, 4–20 mA DC output, HART® communication, and FOUNDATION® Fieldbus can be added. The NLZ series has acquired JPN, ATEX, IECEx, NEPSI, and KOSHA explosionproof certifications.



NLZ1000



NLZ2000



NLZ2000/SC
(Stainless steel indicator)

FEATURES

□ Unified face-to-face dimension

The face-to-face dimension is unified to 250 mm for all connection sizes from 15 mm to 100 mm, which allows for easy piping design.

□ Explosionproof

Intrinsically safe construction: NLZ1000 series

Flameproof construction: NLZ2000 series

■ Metal tube type

□ Accepts a wide variety of fluids

This type can measure various fluids such as liquid, gas, and steam.

□ Accepts corrosive fluid

As standard, this type uses highly corrosion-resistant 316L SS or equivalent.

■ Lining type

□ Uses denatured PTFE for metal tube lining

□ Excellent resistance to chemicals, infiltration, and stress cracking

STANDARD SPECIFICATIONS

■ Metal tube type

- Meter size : 15, 25, 40, 50, 80, 100 mm
- Connection rating (flange connection) : JIS10K, 20K RF
ANSI Class 150, 300RF

Flowmeters for high pressures can be made. Contact us for details.

Note: JIS10K flanges with a connection size of 15 mm to 40 mm are made of JIS 20K. JIS20K flanges are 2 mm thicker but other dimensions are the same as those of JIS10K flanges (see the table below).

● Connection size

Meter size	Connection rating	Available connection sizes			
		1 rank smaller than the meter size	Same as the meter size	1 rank larger than the meter size	2 ranks larger than the meter size
15	10K	N/A	15 *	20 *	25 *
	20K	N/A	15	20	25
	Class 150	N/A	15	20	25
	Class 300	N/A	15	20	Consult us
25	10K	N/A	25 *	40 *	50
	20K	N/A	25	40	Consult us
	Class 150	N/A	25	40	50
	Class 300	N/A	25	40	Consult us
40	10K	N/A	40 *	50	65
	20K	N/A	40	50	Consult us
	Class 150	N/A	40	50	65
	Class 300	N/A	40	50	Consult us
50	10K	N/A	50	65	80
	20K	N/A	50	65	Consult us
	Class 150	N/A	50	65	80
	Class 300	N/A	50	65	Consult us
80	10K	N/A	80	100	125
	20K	N/A	80	100	Consult us
	Class 150	N/A	80	100	125
	Class 300	N/A	80	N/A	N/A
100	10K	N/A	100	125	150
	20K	N/A	100	Consult us	Consult us
	Class 150	N/A	100	125	150
	Class 300	N/A	Consult us	N/A	N/A

Consult us regarding the availability of the sizes marked "Consult us" and other sizes not shown in the table.

- Measuring fluids : Liquid, gas, steam
- Fluid temperature : -20 to +300°C (local indication type)
-20 to +200°C (transmitter type)
For explosionproof types, see each safety class in the table below.
- Fluid pressure : 4.1 MPa at ambient temperature
3.3 MPa at 120°C
Although the maximum allowable operating pressure complies with JIS and ASME/ANSI flange standards, it depends on fluid temperature.
Contact us for details.
- Materials : 316L SS or equivalent for the wetted parts
- Flow rate range : 0.04 to 100 m³/h
(For liquids with density of 1.0 g/cm³, viscosity of 1.0 mPa·s)
1.2 to 600 m³/h (nor)
(For gases at 0°C and 0 MPa [1 atm])
- Accuracy : ±1.5% F.S.
- Rangeability : 10 : 1

■ Lining type

- Meter size : 20, 25, 40, 50, 80, 100 mm
- Connection rating (flange connection only) : JIS10K, 20K RF or equivalent
ANSI Class 150, 300RF or equivalent
Some meter sizes use thicker flanges than the standards.
- Measuring fluids : Liquid
- Fluid temperature : -20 to +120°C
For explosionproof types, see each safety class in the table below.
- Fluid pressure : 4.1 MPa at ambient temperature
3.3 MPa at 120°C
Although the maximum allowable operating pressure complies with JIS and ASME/ANSI flange standards, it depends on fluid temperature.
Negative pressure of up to -0.06 MPa is allowable.
- Materials : Denatured PTFE, PFA, or PTFE for the wetted parts
For details, see EXTERNAL DIMENSIONS.
- Flow rate range : 0.15 to 50 m³/h
(For liquids with density of 1.0 g/cm³, viscosity of 1.0 mPa·s)
- Accuracy : ±2.0% F.S.
- Rangeability : 10:1 (10:2 for flow rates less than 0.3 m³/h)

■ Indicator

1. NLZ1000 series (general type, intrinsically safe type)

- Ambient temperature : -25 to 100°C (local indication type)
See the description of each transmitter for the transmitter type.
See the description of each transmitter for the explosionproof type.
- Ambient humidity : 95%RH or lower
- Protection class : IP65/67
- Painting : Epoxy resin
- Color : Munsell 9.4B4.7/3 (indicator cover)
Munsell N1.5 (indicator base)

2. NLZ2000 series (flameproof type)

- Ambient temperature : -20 to 60°C
- Ambient humidity : 95%RH or lower
- Protection class : IP65/67
- Painting : Epoxy resin
- Color : Munsell 9.4B4.7/3 (indicator cover)
Munsell N1.5 (indicator base)

FUNCTIONS

■ NLZ□□□□/R□ SERIES (REED SWITCH TYPE ALARM)

NLZ□□□□/R□ is a local indication type with a reed switch as a contact for flow alarms. In addition to flow rate indication, it outputs alarm signals at the SPST contact.

Intrinsically safe types and flameproof types are available.

● Transmitter specifications

Alarm point	: 1
Contact system	: Reed switch (a or b contact/SPST)
Rating	: 10 VA AC, 10 W DC as resistance load Max. 125 V AC/0.5 A or Max. 100 V DC/0.5 A
Setting accuracy	: $\pm 2.0\%$ F.S. (against flow scale)
Reset span	: Less than 15% F.S. or 20% F.S. (against flow scale)
Cable entry	: M20 \times 1.5, G1/2, NPT1/2
Construction (optional)	: Intrinsically safe or flameproof (see page 4 for details)
Ambient temperature	: General type -20 to 60°C Intrinsically safe -20 to 60°C Flameproof -20 to 60°C
Insulation resistance	: 100 M Ω or more/500 V DC (between power supply terminals and the indicator case)
Withstand voltage	: 1500 V AC/1 min (between power supply terminals and the indicator case)

● Intrinsically safe type specifications

Max. input voltage	: 30 V DC
Max. input current	: 500 mA

■ NLZ□□□□/N□ SERIES (PROXIMITY SENSOR TYPE ALARM)

NLZ□□□□/N□ is a local indication type with a proximity sensor as a contact for flow alarms. In addition to flow rate indication, it outputs alarm signals complying with the NAMUR standard.

Intrinsically safe types and flameproof types are available.

● Transmitter specifications

Alarm point	: 2 (NLZ1000/high alarm, low alarm, or high and low alarm) 1 (NLZ2000/high alarm or low alarm)
Switch	: Proximity sensor
Contact output	: Complying with NAMUR (ON: 1 mA or less, OFF: 3 mA or more)
Setting accuracy	: $\pm 2.0\%$ F.S. (against flow scale)
Reset span	: Less than 1.5% F.S. (against flow scale)
Cable entry	: M20 \times 1.5, G1/2, NPT1/2
Construction (optional)	: Intrinsically safe or flameproof (see page 4 for details)
Ambient temperature	: General type -20 to 60°C Intrinsically safe -20 to 60°C Flameproof -20 to 60°C
Insulation resistance	: 100 M Ω or more/500 V DC (between power supply terminals and the indicator case)
Withstand voltage	: 500 V DC/1 min (between power supply terminals and the indicator case)

● Intrinsically safe type specifications

Max. input voltage	: 16 V DC
Max. input current	: 52 mA
Max. input power	: 169 mW
Max. internal capacitance	: 150 nF
Max. internal inductance	: 150 μ H

■ NLZ□□□□/E□ SERIES (ELECTRIC TRANSMITTER)

■ NLZ□□□□/H□ SERIES (ELECTRIC TRANSMITTER & HART® COMMUNICATION)

NLZ□□□□/E□ is a local indication type with an electric transmitter. In addition to flow rate indication, it outputs 4–20 mA DC current.

In addition to the function above, NLZ□□□□/H□ allows for HART® communication, which complies with the multi-drop specification.

Intrinsically safe types and flameproof types are available.

● Transmitter specifications

Power supply voltage	: 10 to 30 V DC (Voltage between transmitter terminals) 10 to 28 V DC for intrinsically safe types
Output	: 4 to 20 mA
Effective output range	: 4.0 to 21.6 mA 22.8 mA at abnormal conditions 3.75 mA can be output in special specifications
Allowable load resistance	: Up to 830 Ω (up to 580 Ω /24 V DC) for NLZ□□□□/E□ 230 to 830 Ω for NLZ□□□□/H□ At least 230 Ω is necessary for HART® communication. Use the following formula to determine the allowable load resistance for each supply voltage. Allowable load resistance \leq (power supply voltage [V] – 10) / 0.024 Ω Note that this value includes the load resistance of wiring.
Output accuracy	: $\pm 1.0\%$ F.S. (against flow scale)
Low cut off	: 0 to 20% F.S. (default: 7% F.S.)
Damping	: 0 to 20 sec (default: 1 sec)
Cable entry	: M20 \times 1.5, G1/2, NPT1/2
Construction (optional)	: Intrinsically safe or flameproof (see page 4 for details)
Ambient temperature	: General type -20 to 60°C Intrinsically safe -20 to 60°C Flameproof -20 to 60°C
Insulation resistance	: 20 M Ω or more/500 V DC (between power supply terminals and the indicator case)
Withstand voltage	: 500 V AC/1 min (between power supply terminals and the indicator case)

● Intrinsically safe type specifications

Max. input voltage	: 28 V DC
Max. input current	: 93 mA DC
Max. input power	: 650 mW
Max. internal capacitance	: 5 nF
Max. internal inductance	: 0.2 mH

■ NLZ□□□□/□ SERIES (FOUNDATION FIELDBUS COMMUNICATION)

NLZ□□□□/□ is a local indication type with FOUNDATION Fieldbus communication. In addition to flow rate indication, it outputs digital signals.

Intrinsically safe types and flameproof types are available.

● Transmitter specifications

Power supply voltage : Bus power supply 9 to 32 V DC
(9 to 24 V DC for the intrinsically safe circuit with the safety barrier)
FISCO power supply 9 to 17.5 V

Bus communication:

Base current : Less than 18 mA
In/output signal : Manchester-coded Bus Powered
(IEC 61158-2)

Communication protocol: FOUNDATION Fieldbus (H1)

H1 Device Class : Basic

Function block : One analog input block for volume (or mass) flow rate
One totalizer block for volume (or mass) flow counter

Output accuracy : $\pm 1.0\%$ F.S. (against flow scale)

Low cut off : 0 to 20% F.S. (default : 7% F.S.)

Cable entry : M20 \times 1.5, G1/2, NPT1/2

Construction (optional) : Intrinsically safe or flameproof
(see page 4 for details)

Ambient temperature : General type -20 to +60°C
Intrinsically safe -20 to +60°C
Flameproof -20 to +60°C

Insulation resistance : 20 M Ω or more/500 V DC
(between power supply terminals and the indicator case)

Withstand voltage : 500 V AC/1 min (between power supply terminals and the indicator case)

● Intrinsically safe type specifications

1. Intrinsically safe barrier

Max. input voltage : 24 V DC
Max. input current : 250 mA DC
Max. input power : 1.2 W
Max. internal capacitance : 0.5 nF
Max. internal inductance : 0 mH

2. FISCO model

Max. input voltage : 17.5 V DC
Max. input current : 380 mA DC
Max. input power : 5.32 W
Max. internal capacitance : 0.5 nF
Max. internal inductance : 0 mH

■ NLZ1□□□□/□□/□I SERIES (INTRINSICALLY SAFE CONSTRUCTION)

	Explosionproof class
ATEX	II1G Ex ia IIC T3...T6 Ga
NEPSI	Ex ia IIC T3...T6 Gb
IECEX	Ex ia IIC T3...T6 Ga

Temperature class	Max. fluid temperature	
	ATEX, IECEX	NEPSI
T6	85°C	70°C
T5	100°C	80°C
T4	135°C	120°C
T3	200°C	180°C

■ NLZ2□□□□/□□/□E SERIES (FLAMEPROOF CONSTRUCTION)

	Explosionproof class
ATEX	II2G Ex db IIC T6...T2 Gb II2D Ex tb IIIC T95°C...T210°C Db
NEPSI	Ex db IIC T2...T6 Gb Ex tb IIIC T95°C...T210°C Db
KOSHA	Ex d IIC T6...T2 Ex tD A21 IP65/67 T95°C...T210°C
IECEX	Ex db IIC T6...T2 Gb Ex tb IIIC T95°C...T210°C Db
JPN Ex	Ex db IIC T6...T2 Gb Ex tb IIIC T95°C...T210°C Db

Temperature class	Max. fluid temperature
	ATEX, NEPSI, KOSHA, IECEX
T6	70°C
T5	90°C
T4	125°C
T3	190°C
T2	200°C

Temperature code (dust)	Max. fluid temperature
	ATEX, NEPSI, KOSHA, IECEX
95°C	85°C
110°C	100°C
145°C	135°C
195°C	185°C
210°C	200°C

ADDITIONAL FUNCTIONS


■ Cable entry

Select an appropriate cable entry from MODEL CODE.

■ Damper device

All sizes of metal tube types for gas measurement are equipped with a damper as standard. The damper device can also be added for measuring a liquid with pulsation.

The use of a damper device is not recommended for chlorine gas that easily forms chemical compounds and fluids containing rust, debris and oil because these may hinder the function of the device.

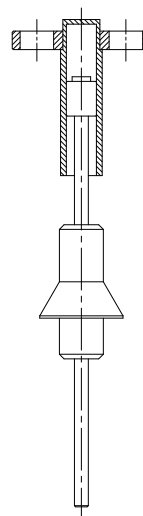

FLOW RATE TABLE

■ Metal tube type

Meter size	Water		Air	
	Flow rate (m³/h)	Max. pressure loss (kPa)	Flow rate (m³/h) (nor)	Max. pressure loss (kPa)
15	0.04 to 2.0	15	1.2 to 45	25
25	1.5 to 5.4	20	45 to 135	36
	5.4 to 6.0 *	24		
40	5.0 to 10.5	9	130 to 230	22
50	9.0 to 16.8	13	220 to 300	9
	16.8 to 21.5 *	19	300 to 400 *	14
80	20 to 40	27	390 to 600 *	18
	40 to 50 *	40		
100	50 to 100 *	32	—	—

Flow rate ranges marked with * have an alarm reset span of 20% of F.S.
Flow rates in the table above are values converted into those of water (density: 1.0 g/cm³, viscosity: 1.0 mPa·s) or air (at 0°C, 0 MPa [1 atm]). These values are the flow range in the maximum graduation.

□ How to convert flow rates

1. Liquid applications

Regarding liquid applications, flow rates in the flow rate table above are those of water (density: 1.0 g/cm³, viscosity: 1.0 mPa·s). If actual fluid conditions are different, it is necessary to convert flow rates with the following formula.

$$Q_w = Q \times 2.59 \sqrt{\frac{(7.7/\rho) - 1}{1}}$$

Q_w : Water-converted flow rate (m³/h)

Q : Flow rate of actual liquid (m³/h)

ρ : Density of actual liquid (g/cm³)

Consult us about high viscosity applications.

2. Gas applications

Regarding gas applications, flow rates in the flow rate table above are those of air at 20°C, 0 MPa (1 atm). If actual fluid conditions are different, it is necessary to convert flow rates with the following formula.

$$Q_A = Q \times 0.01635 \times \sqrt{\frac{\rho \times (273 + t)}{(0.1013 + P)}}$$

Q_A : Air-converted flow rate at 0°C, 0 MPa [m³/h (nor)]

Q : Flow rate of actual gas [m³/h (nor)]

ρ : Density of actual gas [kg/m³ (nor)]

P : Operating pressure (MPa)

t : Operating temperature (°C)

3. Steam applications

Steam flow rates are converted into those of air (at 0°C, 0 MPa) with the following formula.

$$Q_A = 0.8488 \times Q_{s1} / \sqrt{\rho_s}$$

$$Q_A = 0.8488 \times Q_{s2} \times \sqrt{\rho_s}$$

Q_A : Air-converted flow rate at 0°C, 0 MPa [m³/h (nor)]

Q_{s1} : Flow rate of steam (mass) (unit: kg/h)

Q_{s2} : Flow rate of steam (volume) (unit: m³/h)

ρ_s : Density of steam (kg/m³)

■ Lining type

Meter size	Water	
	Flow rate (m³/h)	Max. pressure loss (kPa)
20	0.15 to 1.2 ^{Note}	9
25	0.7 to 3.5	14
40	3.0 to 6.0	6
50	5.0 to 15.0	11
80	10.0 to 25.0	12
100	20.0 to 50.0	10

Flow rates in the table above are values converted into those of water (density: 1.0 g/cm³, viscosity: 1.0 mPa·s). These values are the flow range in the maximum graduation.

Note: The flow range will be 10:2 for flow rates less than 0.3 m³/h.

□ How to convert flow rates

Flow rates in the flow rate table above are those of water (density: 1.0 g/cm³, viscosity: 1.0 mPa·s). If actual fluid conditions are different, it is necessary to convert flow rates with the following formula.



$$Q_w = Q \times 2 \sqrt{\frac{(5/\rho) - 1}{1}}$$

Q_w : Water-converted flow rate (m³/h)

Q : Flow rate of actual liquid (m³/h)

ρ : Density of actual liquid (g/cm³)

Consult us about high viscosity applications.

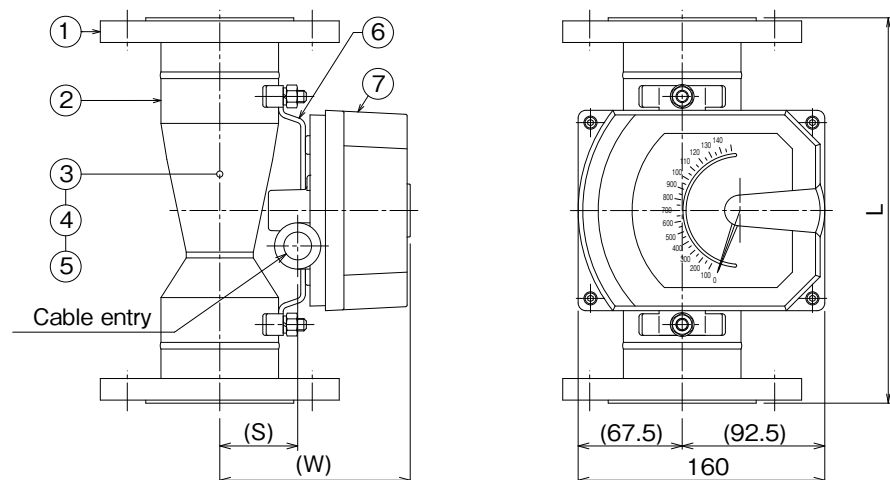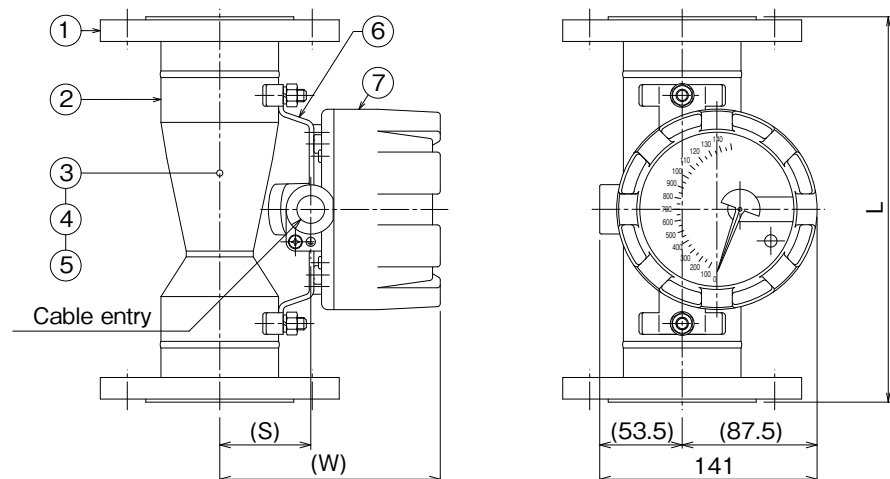EXTERNAL DIMENSIONS**■ Metal tube type****NLZ1000****NLZ2000****Materials**

No.	Description	Material
1	Flange	316L SS
2	Tapered tube	316L SS / SCS16
3	Float guide	316L SS
4	Stop ring	316L SS
5	Float	316L SS
6	Fittings	316 SS
7	Indicator	ADC12

Note:

- The upper float guide is replaced with the damper (cylinder) for gas and steam services or other services where a damper is required.
- The lower float guides fixed to the flanges of 15 mm and 100 mm meter size cannot be removed.

External dimensions


Meter size	Connection size (mm) (inch)	Dimensions (mm)	NLZ1000			NLZ2000		
			Dimensions (mm)		Approx. mass (kg) *	Dimensions (mm)		Approx. mass (kg) *
		L	S	W		S	W	
15	15 (1/2)	250	50.5	123.5	3.0	53.5	137.5	3.5
25	25 (1)	250	50.5	123.5	4.5	53.5	137.5	5.0
40	40 (1-1/2)	250	50.5	123.5	5.0	53.5	137.5	5.5
50	50 (2)	250	50.5	123.5	7.5	53.5	137.5	8.0
80	80 (3)	250	52.5	125.5	13.5	55.5	139.5	14.0
100	100 (4)	250	69.5	142.5	18.5	72.5	156.5	19.0

* Approximate mass is for ANSI Class 150.


EXTERNAL DIMENSIONS

■ Lining type

NLZ1000

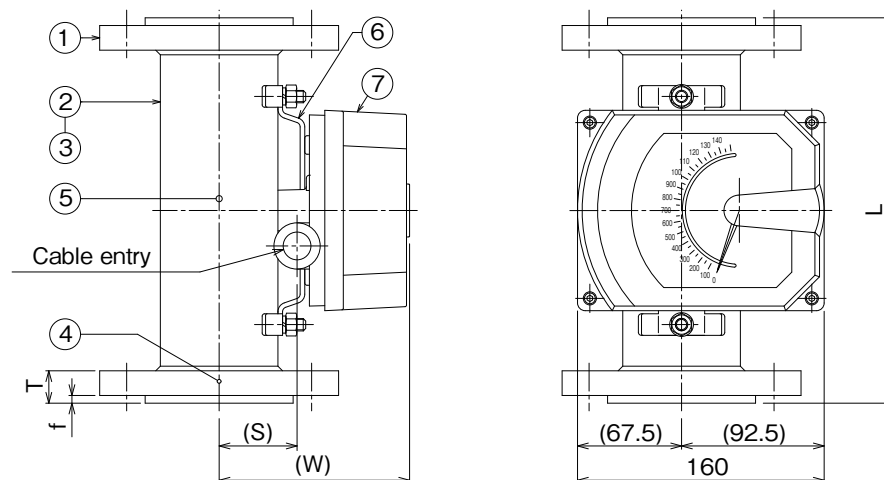

NLZ2000

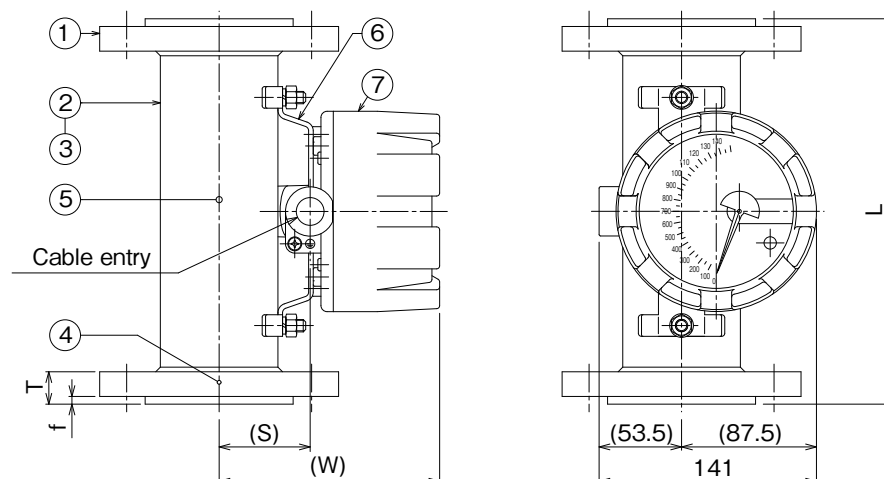

Materials

No.	Description	Material
1	Flange	316 SS
2	Main body	316 SS
3	Main body lining	Denatured PTFE
4	Float guide	PFA
5	Float	PFA or PTFE/PFA
6	Fittings	316 SS
7	Indicator	ADC12

External dimensions

Meter size	Dimensions (mm)			NLZ1000			NLZ2000		
				Dimensions (mm)		Approx. mass (kg) *3	Dimensions (mm)		Approx. mass (kg) *3
	L	T *1 (same size)	f *2	S	W		S	W	
20	250	19	5 (3)	19.0	92.0	4.5	22.0	106.0	5.0
25	250	19	5 (3)	50.5	123.5	5.5	53.5	137.5	6.0
40	250	21	5 (3)	50.5	123.5	7.0	53.5	137.5	7.5
50	250	21	5 (3)	50.5	123.5	9.5	53.5	137.5	10.0
80	250	22	6 (4)	52.5	125.5	14.5	55.5	139.5	15.0
100	250	22	6 (4)	69.5	142.5	21.5	72.5	156.5	22.0

*1 The thickness of the flange (T) depends on the flange rating (values in the table are for the same size as JIS10K).

Confirm details in the approval drawing and select a bolt with an appropriate length.

*2 Values in parentheses are applicable to ANSI Class 150/300.

*3 Approximate mass is for a flange with the same size as JIS10K.

MODEL CODE**1. Main body**

□ Metal tube type

NLZ	*	*	*	*	- *	*	*	- *	*	*	*	/ **	Specifications	Restriction on selection			
														Liquid		Gas	
Indicator type	1												Non-explosionproof or intrinsically safe construction	See MODEL CODE of NLZ1000 series.			
	2												Flameproof construction	See MODEL CODE of NLZ2000 series.			
Main body	1												Metal tube type	Fixed code			
Wetted parts material	1												316L SS / SCS16				
Float material	1												316L SS				
Connection rating					-J1								JIS 10K	See “Available connection sizes” on Page 2.			
					-J4								JIS 20K				
					-A2								ANSI Class 150				
					-A5								ANSI Class 300				
Flange face						RF							RF flange	Fixed code			
Connection size							1						15A 1/2"	Available connection sizes are the same as the meter size, or 1 or 2 ranks larger than the meter size. For details, see “Available connection sizes” on Page 2.			
							2						20A 3/4"				
							3						25A 1"				
							4						40A 1-1/2"				
							5						50A 2"				
							6						65A 2-1/2"				
							7						80A 3"				
							8						100A 4"				
							9						125A 5"				
Meter size								-1					15A	Qw (m³/h)	0.04 to 2.0	QA (m³/h) (nor)	1.2 to 45
								-3					25A		1.5 to 6.0		45 to 135
								-4					40A		5.0 to 10.5		130 to 230
								-5					50A	Water at 20°C	9.0 to 21.5	Air at 20°C, 0 MPa	220 to 400
								-7					80A		20.0 to 50.0		390 to 600
								-8					100A		50.0 to 100.0		
	Tapered tube								+					Tapered tube model number	Fixed code (manufacturer's code)		
Float									+				Float model number				
Damper												1	Not provided	Standard		N/A	
												2	Provided	Contact us.		Standard	
Additional functions for the indicator												/ **		See MODEL CODE of the indicator.			
Special specifications												/Z	Other special specifications	Contact us.			

MODEL CODE

□ Lining type

NLZ	*	*	*	*	-	*	*	*	*	*	*	/	*	*	Specifications			Restriction on selection				
Indicator type	1														Non-explosionproof or intrinsically safe construction			See MODEL CODE of NLZ1000 series.				
	2														Flameproof construction			See MODEL CODE of NLZ2000 series.				
Main body	L														Lining type			Fixed code				
Wetted parts material	F														Denatured PTFE lining							
Float material	F														PFA lining or PFA/PTFE							
Connection rating															JIS 10K or equivalent			Applicable to all types				
															JIS 20K or equivalent							
															ANSI Class 150 or equivalent							
															ANSI Class 200 or equivalent							
Flange face					RF										RF flange			Fixed code				
Connection size								2							20A 3/4"			Available connection sizes are the same as the meter size, or 1 rank larger than the meter size.				
								3							25A 1"							
								4							40A 1-1/2"							
								5							50A 2"							
								6							65A 2-1/2"							
								7							80A 3"							
								8							100A 4"							
Meter size								9							125A 5"			Qw (m³/h) Water at 20°C	0.15 to 1.2 * 0.7 to 3.5 3.0 to 6.0 5.0 to 15.0 10.0 to 25.0 20.0 to 50.0	* The range is 10 : 2 for flow rates less than 0.3 m³/h.		
								-2							20A							
								-3							25A							
								-4							40A							
								-5							50A							
								-7							80A							
							-8							100A								
Tapered tube									+					Tapered tube model number			Fixed code (manufacturer's code)					
Float									+					Float model number								
Damper											1				Not provided			Fixed code				
Additional functions for the indicator													/	*	*				See MODEL CODE of the indicator.			
Special specifications													/	Z			Other special specifications			Contact us.		

MODEL CODE**2. Indicator option code**

□ NLZ1000 series

NLZ	*	*	*	*	-	*	*	*	*	-	*	*	*	*	/ **	Specifications	Restriction on selection
Indicator type	1															Non-explosionproof or intrinsically safe construction	
Main body code	*	*	*	*	-	*	* <td>*</td> <td>*</td> <td>-</td> <td>*</td> <td>*</td> <td>*</td> <td>*</td> <td></td> <td></td> <td>See MODEL CODE of the main body</td>	*	*	-	*	*	*	*			See MODEL CODE of the main body
Additional function	Alarm contact output: Reed switch (1 point)														/RA	1 point alarm (high close)	Multi-selection is not possible. Symbols after “/NW” specify switch actions. A: High close B: High open C: Low close D: Low open Example: “/NWAB” means high alarm close × 1 and high alarm open × 1.
															/RB	1 point alarm (high open)	
	Alarm contact output: Proximity sensor (1 or 2 points)														/RC	1 point alarm (low close)	
															/RD	1 point alarm (low open)	
															/NA	1 point alarm (high close)	
															/NB	1 point alarm (high open)	
	Current output (2-wire system with 4–20 mA DC output)														/NC	1 point alarm (low close)	
															/ND	1 point alarm (low open)	
	Current output with HART® communication (2-wire system with 4–20 mA DC output with HART® communication)														/NW	2 points alarm	
															/E1	Electrical transmitter	
	FOUNDATION Fieldbus H1 communication														/E2	Electrical transmitter (intrinsically safe)	
															/H1	Electrical transmitter with HART® communication	
	Explosion-proof approval (Ex i)														/H2	Electrical transmitter with HART® communication (intrinsically safe)	
/F1															FOUNDATION Fieldbus H1 transmitter		
Cable entry														/F2	FOUNDATION Fieldbus H1 transmitter (intrinsically safe)		
														/EI	ATEX		
Option														/CI	NEPSI	Multi-selection is not possible.	
														/XI	IECEX		
Special specifications														/M2	M20 × 1.5 (F)	Multi-selection is not possible.	
														/GH	G1/2 (F)		
Option														/NP	NPT1/2 (F)	No restriction	
														/OL	Degrease treatment		
Painting														/WL	Non-water treatment	No restriction	
														/AP	Pickling treatment		
Inspection														/PS	Special painting	No restriction	
														/AT	Airtightness inspection		
Accessories														/AC	Provided	IR series, amplifier for alarm, etc.	
														/Z	Special		Contact us.

□ NLZ2000 series

NLZ	*	*	*	*	-	*	*	*	*	*	*	/	**	Specifications			Restriction on selection			
Indicator type	2													Flameproof construction						
Main body code	*	*	*	*	-	*	*	*	*	*	*						See MODEL CODE of the main body.			
Additional function	Alarm contact output: Reed switch (1 point)												/RA	1 point alarm (high close)		Multi-selection is not possible.				
													/RB	1 point alarm (high open)						
													/RC	1 point alarm (low close)						
													/RD	1 point alarm (low open)						
	Alarm contact output: Proximity sensor (1 point)												/NA	1 point alarm (high close)						
													/NB	1 point alarm (high open)						
													/NC	1 point alarm (low close)						
													/ND	1 point alarm (low open)						
	Current output (2-wire system with 4–20 mA DC output)												/E1	Electrical transmitter						
	Current output with HART® communication (2-wire system with 4–20 mA DC output with HART® communication)												/H1	Electrical transmitter with HART® communication						
	FOUNDATION Fieldbus H1 communication												/F1	FOUNDATION Fieldbus H1 transmitter						
	Explosion-proof approval (Ex d)												/JE	JPN Ex			Multi-selection is not possible.			
													/EE	ATEX						
													/CE	NEPSI						
													/KE	KOSHA						
/XE													IECEX							
Cable entry												/M2	M20 × 1.5 (F)		Multi-selection is not possible.					
												/NP	NPT1/2 (F)							
Special indicator												/SC	Stainless steel (SCS14) indicator							
Option	Washing												/OL	Degrease treatment		No restriction				
													/WL	Non-water treatment						
													/AP	Pickling treatment						
	Painting												/PS	Special painting		No restriction				
	Inspection												/AT	Airtightness inspection		No restriction				
	Accessories												/AC	Provided		IR series, etc.				
Special specifications												/Z	Special		Contact us.					

STANDARD GRADUATION

There are 17 standard graduation patterns.

Scale range	Graduation divisions						
1.0 – 10	1	2	4	6	8	10	
1.2 – 12	1.2	2	4	6	8	10	12
1.5 – 15	1.5	2.5	5	7.5	10	12.5	15
1.6 – 16	1.6	5	10	15	16		
1.8 – 18	1.8	5	10	15	18		
2.0 – 20	2	5	10	15	20		
2.5 – 25	2.5	5	10	15	20	25	
3.0 – 30	3	5	10	15	20	25	30
3.5 – 35	3.5	10	20	30	35		
4.0 – 40	4	10	20	30	40		
4.5 – 45	4.5	10	20	30	40	45	
5.0 – 50	5	10	20	30	40	50	
6.0 – 60	6	10	20	30	40	50	60
7.0 – 70	7	20	40	60	70		
7.5 – 75	7.5	20	40	60	75		
8.0 – 80	8	20	40	60	80		
9.0 – 90	9	20	40	60	80	90	

CAUTIONS

- This flowmeter transmits the displacement caused by the magnet coupling. The surrounding magnetic field might affect its performance.
- Avoid installing in a magnet field and do not bring magnetic materials close (less than 20 cm) to the flowmeter. Note that insulation covers may affect the performance.
- When installing two or more flowmeters, install them at least 30 cm apart to avoid mutual interference.

■ Lining type

- There is a bend hole on the metal tube for degassing. Do not clog the hole with paint or heat insulator. Moisture at the bend hole may serve as solvent for corrosive gas and corrode the metal tube. Be sure to prevent rain water or condensation from entering the bend hole.
- We recommend the following gaskets for flange connection.
 - T#/9010 series (Nichias)
 - V#/N7030 series (Nippon Valqua Industries)

* Specification is subject to change without notice.

 TOKYO KEISO CO., LTD.

Head Office : Shiba Toho Building, 1-7-24 Shibakoen, Minato-ku, Tokyo 105-8558

Tel : +81-3-3431-1625 (KEY) ; Fax : +81-3-3433-4922

e-mail : overseas.sales@tokyokeiso.co.jp ; URL : <https://www.tokyokeiso.co.jp>