



TECHNICAL GUIDANCE

High flow rate measurement,
Lightweight aluminum alloy body

TF-4150/4160/4170

THERMAL MASS FLOWMETER

OUTLINE

TF-4100 series Thermal Mass Flowmeter for high flow rate measurement has been developed by our long experience and the accumulation of technology for the thermal mass flow measurement. Low price, but digital indicator (fixed and rotating) excellent in the visibility is built in. Digital and analog interfaces are fully equipped, and the lightweight aluminum alloy and stainless steel are available for main body. The power supply is 12 to 24 V DC. The rotating indicator type complies with the CE marking. This thermal mass flowmeter is suitable for the various applications.

FEATURES

- Sensor and converter are integrated in one unit with digital indication. Furthermore, an indication is excellent in visibility for LED type of self-luminous indication.
- An indication part can be rotated according to the flow direction. (TF-4152-□□, TF-4162-□□)
- It is lightweight because main body is made of aluminum alloy.
- The ambient condition of use has been improved. Construction is equivalent to IP64.
- Integration of main body and display has made it simple and compact.
- Theoretically, measurement accuracy is not affected by changes in operating pressure or temperature.
- Digital and analog interfaces are provided.
- Pulse output or alarm output can be chosen for open collector.
- Since a setup of totalizing rate and alarm point can be made, the correspondence to various applications is possible.
- Power supply is 12 to 24 V DC suitable for the sequencer.

MAIN APPLICATIONS


- Semiconductor field
- Automobile field
- Biochemical
- Precision instrument field
- Air conditioning application

OPERATION PRINCIPLE

A resistance thermometer R_w is installed in the flow path. The current I is controlled to keep the temperature difference ($T_w - T_a$) between the temperature T_w and gas temperature T_a constant by heating with electric current.

The quantity of heat ($R_w \times I^2$) transferred from the resistance thermometer is a function of mass flow rate of passed gas, thus the mass flow rate can be measured from the electric current I .

The electric circuit to detect the flow is a unique component to compensate even the minute change of performance with the change of physical properties value. Thus the mass flow rate can be measured with high accuracy. The current I is converted to an electric signal in proportion to the specified flow rate in order to be output.





SPECIFICATIONS

Measuring object	Air, N ₂		
Flow range	0 to 4000L/min (nor) TF-415□-□□ 25A 0 to 8000L/min (nor) TF-416□-□□ 40A 0 to 16000L/min (nor) TF-417□-□□ 50A		
Ambient & gas temperature	0 to 60°C (No condensation)		
Gas pressure	0.1 to 1.0MPa		
Accuracy	±2% F.S. (1digit of indication accuracy added)		
Response	Within 1 sec. (90% response)		
Temp. & press. effect	0.1%F.S./°C, 0.1%F.S./0.1MPa		
Rangibility	1:20 (Low flow cutoff: 2.5% F.S.)		
Material of gas contact part	Main body	A6061-T6 or SCS13 (Selectable)	
	Sensor	SUS316, glass, platinum-iridium	
	Seal	Fluororubber and NBR	
Case	ABS resin		
Process connection	Rc1, Rc1.1/2, & Rc2 (Depending on model)		
Electric connection	Exclusive cable with connector (5m long) AWG24		
Installation posture	Horizontal or vertical		
Indication	7 segments Red LED, 5 digits Flow rate, totalization, setting value & error Momentary flow rate: 0.00 to 99999. • A decimal point is displayed by automatic change. • An integrated value is not held at the time of a nonpower supply. Red LED × 2 pcs. Lighting when alarm is operating.		
	Output*	Aanalog	0 to 5 V DC (Output impedance: 50 Ω or less), or 4 to 20 mA DC (Load resistance: 300 Ω or less for 12 V power supply; 600 Ω or less for 24 V power supply) (Selectable)
		Digital	RS-485, 2-wire connection, asynchronous serial communication Communication speed: 2400, 4800, 9600 bps (Selectable) Protocol: 8N1, ID address: 00 to 99
		Integrating pulse	Open collector (30VDC, less than 100mA) • 0.2 to 10.0% F.S.:min/pulse (Selectable)
Alarm	Open collector (30VDC, less than 100mA)		
Power supply	12 to 24VDC, Max.200mA		
CE marking	Conformity (rotating indicator type only)		


* Integrating pulse and alarm (upper/lower) can not be outputted at the same time.

MODEL CODE AND PRESSURE LOSS


TF-41	□	□	—	□	□	Description	Max. pressure loss*3	
Nominal diameter, Connection, Scale range	5					25A, Rc 1, 0 to 4,000 L/min (nor)	39 kPa	
	6					40A, Rc 1 1/2, 0 to 8,000 L/min (nor)	33 kPa	
	7					50A, Rc 2, 0 to 16,000 L/min (nor)	39 kPa	
Direction of the connector and the indicator	0					Upstream connector, Fixed indicator *1	*1 : TF-41□0-□□ Direction of the indicator FLOW →	
	1					Downstream connector, Fixed indicator *2		*2 : TF-41□1-□□ Direction of the indicator FLOW →
	2					Upstream connector, Rotatable indicator (Except 50A)		
Body material	0					A6061-T6		
	1					SCS13 (Except 50A)		
Analog output	1					0 to 5 V DC		
	2					4 to 20 mA DC		

*3: Pressure loss (at 0.1MPa F.S)

DISPLAY

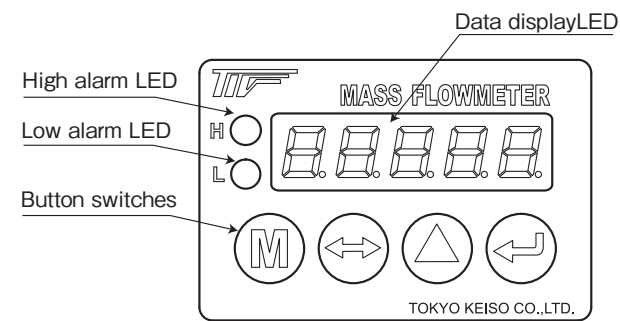



CONNECTOR PIN NO.



ELECTRICAL CONNECTION

Fixed indicator type 0 to 5 V DC output: TF-41□0-□1,TF-41□1-□1
 Fixed indicator type 4 to 20 mA DC output: TF-41□0-□2,TF-41□1-□2
 Rotating indicator type 0 to 5 V DC output: TF-41□2-□1

Rotating indicator type (4 to 20 mA DC output): TF-41□2-□2
 Note: Do not connect the power supply (-) and analog output (-) .

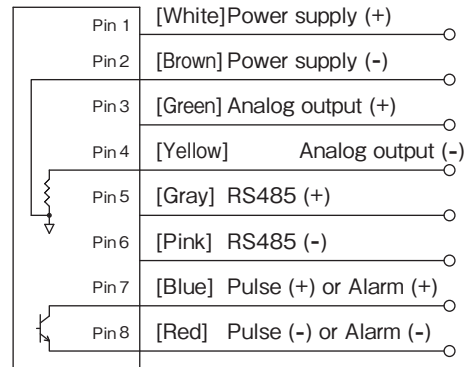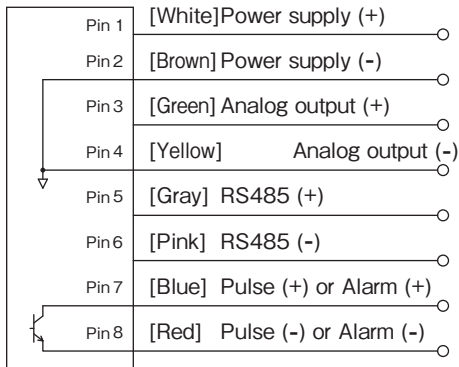


ROTATABLE INDICATOR TYPE

The indicator direction of rotatable indicator type (TF-4152, TF-4162) can be easily changed at the installation site according to the flow direction.



DIMENSIONS 1


25A, body:A6061-T6
TF-4150-0□

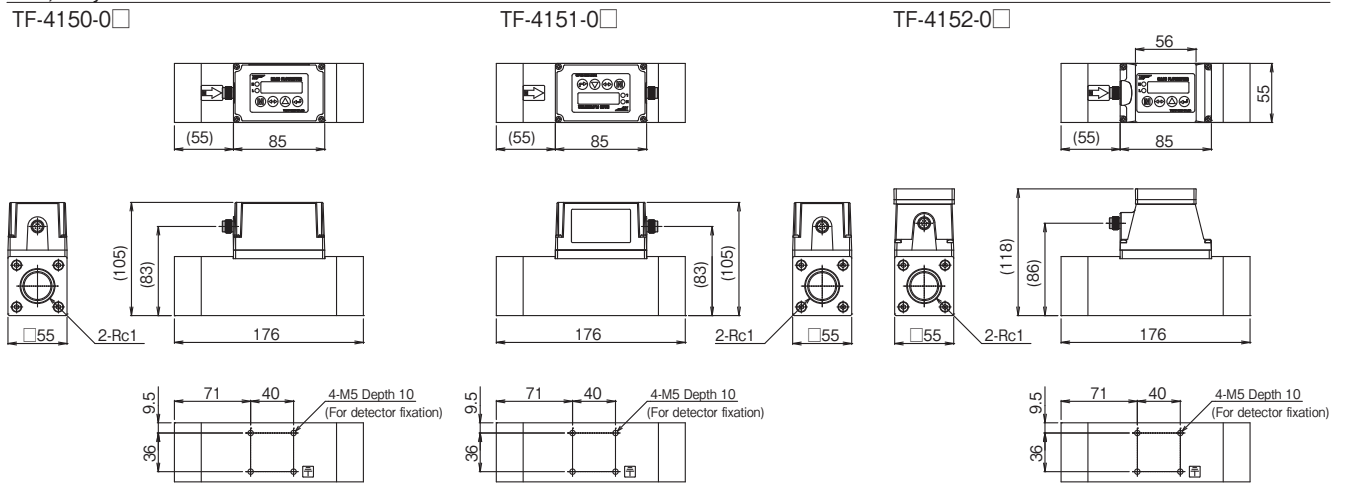

TF-4151-0□

TF-4152-0□


25A, body:SCS13
TF-4150-1□

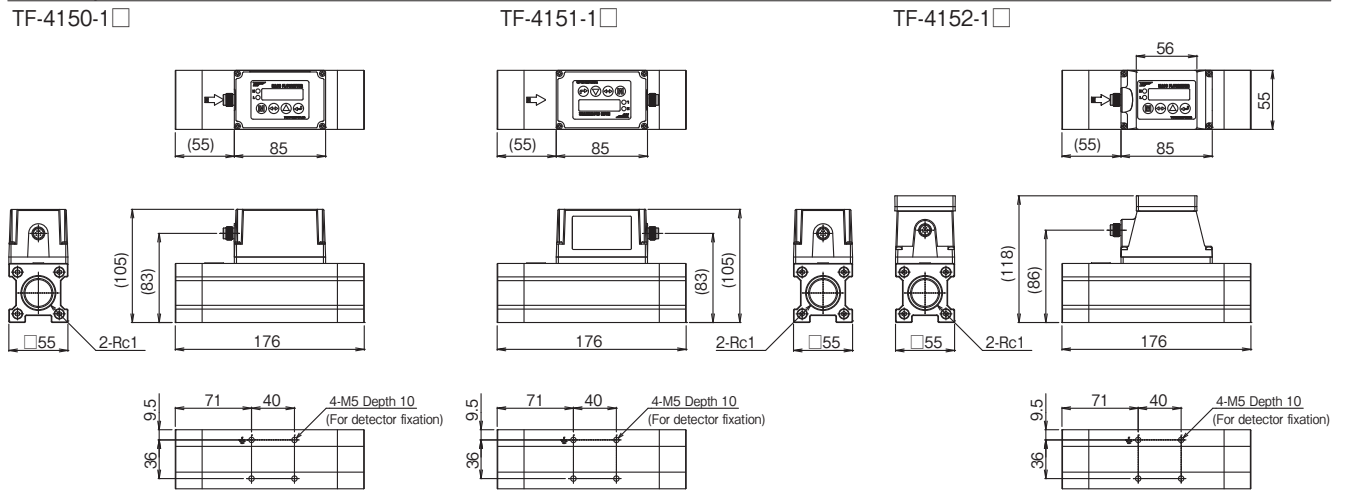

TF-4151-1□

TF-4152-1□

40A, body:A6061-T6
TF-4160-0□

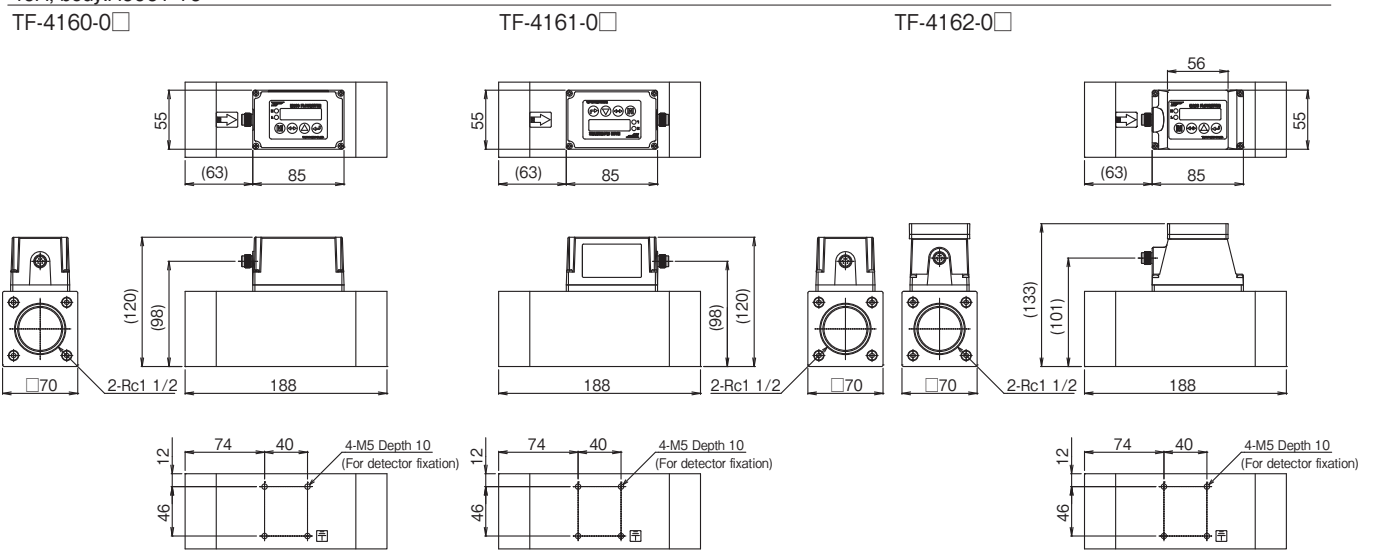

TF-4161-0□

TF-4162-0□


DIMENSIONS 2

40A, body:SCS13

TF-4160-1□

TF-4161-1□


TF-4162-1□

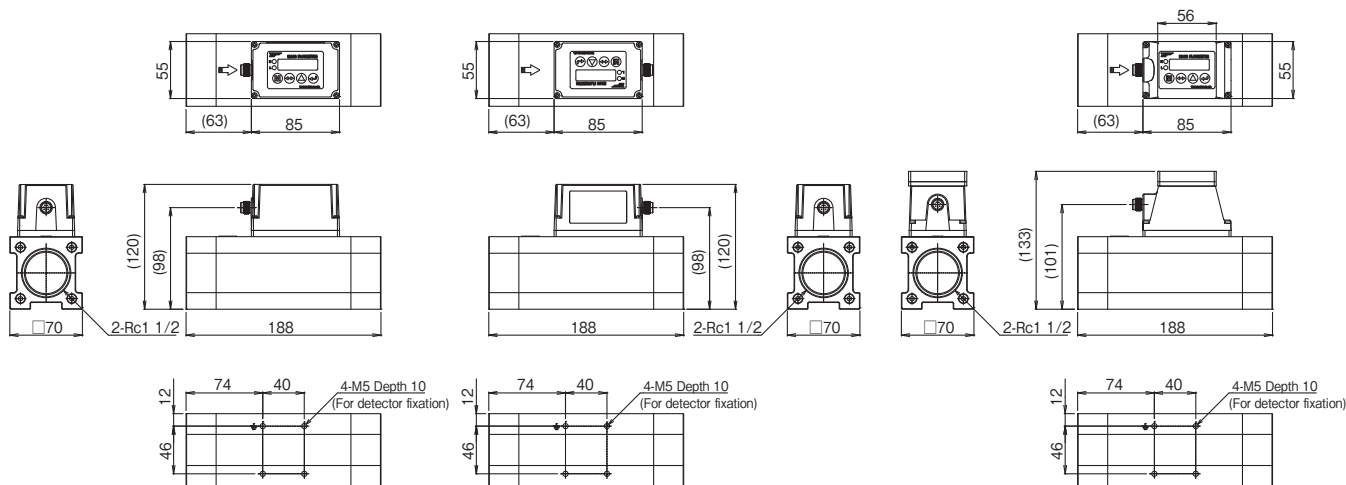

50A, body:A6061-T6

TF-4170-0□

TF-4171-0□

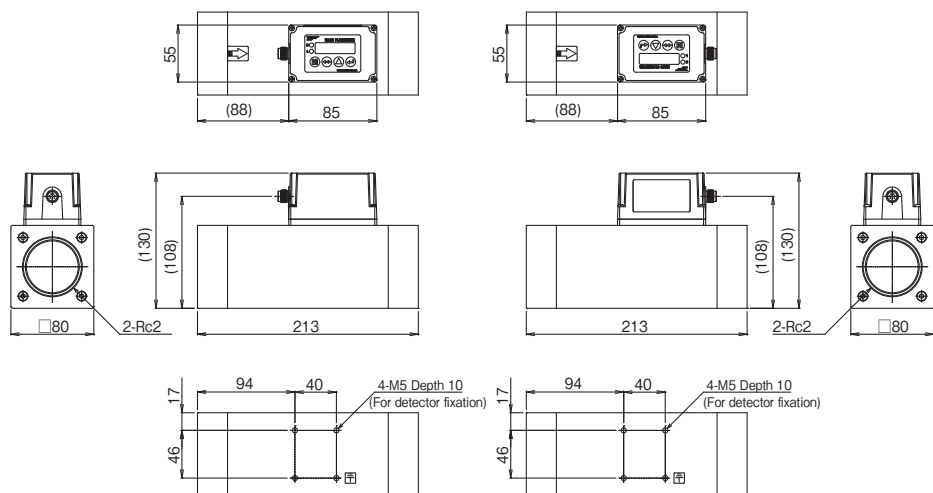

* Specification is subject to change without notice.

TK TOKYO KEISO CO., LTD.

Head Office : Shiba Toho Building, 1-7-24 Shibakoen, Minato-ku, Tokyo 105-8558

Tel : +81-3-3431-1625 (KEY) ; Fax : +81-3-3433-4922

e-mail : overseas.sales@tokyokeiso.co.jp ; URL : http://www.tokyokeiso.co.jp